

## RSC-4EHS



### Features :

- 24 x 3.5" hot swap drive trays
- 3 x easy swap middle fans for superior cooling
- 80+ Silver or Gold redundant power supply
- Rear access power supply alarm reset button


### SPECIFICATIONS

|   |   |                         |                   |
|---|---|-------------------------|-------------------|
| <b>Dimensions</b><br>(W x D x H)<br>(with chassis ears) | mm : 483 x 520 x 173.5                      |                         |                   |
|   | inches : 19 x 20 x 6.8                      |                         |                   |
| <b>Industry Standard</b>                                | EIA-RS310D                                  |                         |                   |
| <b>Material</b>   | Heavy-duty preplated SPGC cold-rolled steel |                         |                   |
| <b>Color</b>  | Front Panel : Black                         |                         |                   |
| <b>Cooling</b>  | Standard                                    | 3 x 8038                |                   |
|   | Add-on                                      | Rear : 2 x 60x38mm fans |                   |
| <b>Power Supply</b>                                     | Options                                     | 549W                    |                   |
| <b>Expansion Slots</b>                                  | 7   |                         |                   |
| <b>Front Panel</b>                                      | Power on/off and system reset               |                         |                   |
| <b>LED Indicators</b>                                   | Power, LAN and Drive                        |                         |                   |
| <b>System Board</b>                                     | 12"(W) x 9.6"(D) ATX MB                     |                         |                   |
| <b>Drive Bays</b>                                       | External                                    | 3.5" hot swap           | 24                |
|   |   | 2.5" hot swap           | 2 x 2.5" hot swap |

|                                |                         |  |
|--------------------------------|-------------------------|--|
| <b>Backplane</b>               | Options                 | 1 x 24-port 6Gb SAS backplane with 36-PHY expander and 3 SFF-8087 connectors |
| <b>Storage Temperature</b>     | 0°C(32°F) ~ 50°C(122°F) |  |
| <b>Humidity</b>                | 5%~95% non-condensing   |  |
| <b>Cubic Feet</b>              | 7.5                     |  |
| <b>Container Load Quantity</b> | 20'                     | 125  |
|                                | 40'                     | 260  |
|                                | 40' H                   | 315  |
| <b>Mounting</b>                | Standard                | 28" tool-less slide rail   |

## • FRONT VIEW •

24 x 3.5" hot swap drive trays

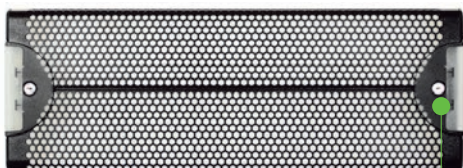

Optional - Front bezel with key lock for security and protection

## • TOP VIEW •

2 x 2.5" hot swap



1 x 24-port 6Gb SAS backplane with 36-PHY expander

## • REAR VIEW •


7 x slots



Optional - 2 x 6038 rear add-on fans



## MECHANICAL DRAWING

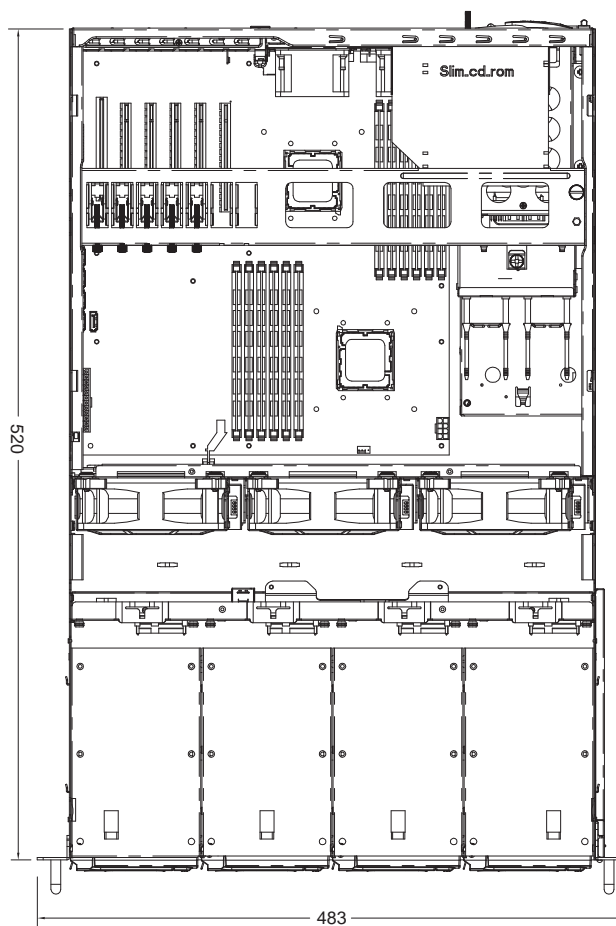

\* Power supply is included. Motherboard is not included.