Hot Swap and Modularized 12G SAS JBOD Series

APPLICATIONS : Near-line Database Expansion Storage • High Performance Direct Attached Storage for HPC or Application Server • Virtual Tape Library • Multimedia on Demand • Online E-mail Storage • Local Storage for Video Post-productions • Digital Content Source Database Storage • Private / Public Cloud Expansion

J4060-02

Features :

- Intelligent Enclosure Manage
- Individual drive power management
- Easy swap design for maintenance and management
- Zoning support for easy deployment
- Optimized Thermal and Energy saving solution
- Tool-less drive trays

FRONT VIEW

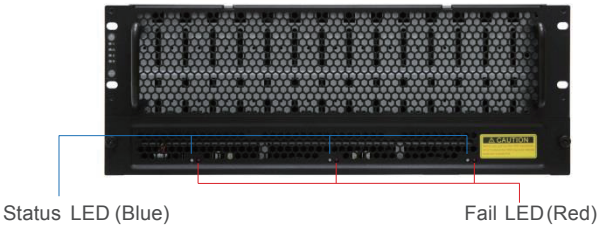

REAR VIEW

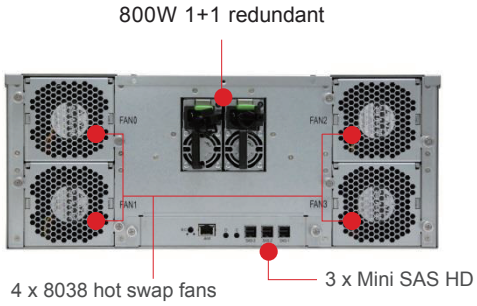

SPECIFICATIONS

General	Number of Expander	1 x External expander 3 x Internal expander
	Expander Chip	LSI SAS 35x36R + LSI SAS 35x28R
	Host/Expansion Interface	3 x Mini SAS HD
Drives Supported	Drive Interface	6.0 Gb SATA, 6.0/12.0 Gb SAS
	Form Factor	3.5”
Administration / Management	Admin/Firmware Upgrade	In-band & Serial port interface IEM port (Optional)
	LED indicators, Audible Alarm	Yes
Hot swap and Redundancy	Drive Bays	Hot-swap 60-bay
	Cooling	4 x 8038 hot-swap fans
	Power Supply	800W 1+1 redundant
	Power Entry	Dual AC Inlet
	Expander Modules	Dual expanders (Optional)

Electrical and Environmental	Universal A/C Input	Typical: 100~240V AC full range Option : 336HVDC or -48DC
	Operating Environment	Temperature : 0ºC to 35ºC Relative humidity : 20% to 80%
	Non-operating Environment	Temperature : -20ºC to 60ºC Relative humidity : 10% to 90%
Physical Specification	Dimensions (W x D x H)	mm : 435 x 795 x 175.75
		inches : 17.1 x 31.3 x 6.9
	Gross Weight (w/ PSU, w/o Rail & Disks)	kgs : 32.4
		lbs : 71.4
	Packaging Dimensions (W x D x H)	mm : 615 x 1115 x 428
		inches : 24.2 x 43.8 x 16.8
Mounting	Standard	36” slide rail
	Option	26” tool-less rail

www.aicipc.com

Remark: All specifications and photos are subject to change without notice.

© 2017 AIC Inc. All rights reserved.