



Front View



Optional item - Front door

Features

- Tool-less design supports quick installation and easy maintenance:
 - Tool-less 3.5" & 2.5" drive trays
 - Tool-less top covers
 - Tool-less backplane
 - Tool-less slide rails
- 12Gb/s SAS expander chip on backplane
- Specially designed hot swap and low power consumption fans minimize rotational vibration and provide superior cooling
- 3.5" drive tray comes with 4 screw holes to adapt to 2.5" drive
- Comes with a redundant PSU 80+ Platinum
- Two front access USB 3.0 ports

Rear View




Specifications

Dimensions (W x D x H)	mm : 430 x 680 x 133		
	inches : 17 x 26.8 x 5.2		
Industry Standard	EIA-RS310D		
Material	Heavy-duty preplated SPGC cold-rolled steel		
Color	Front Panel : Black		
Cooling	3 x 80x38mm PWM & low-power consumption hot swap fans		
Power Supply	800W 1+1 redundant PSU PMBus 1.2 80+ Platinum		
Expansion Slots	7		
Front Panel	System power on/off, system reset and 2 x USB 3.0 ports		
LED Indicators	Power, LAN, Drive and Alert		
System Board	12"(W) x 13"(D) E-ATX/SSI EEB 3.6 compliant MB		
Drive Bays	External	3.5" hot swap	16
	Internal	2.5"	Options : • 6 x 2.5" internal • 4 x 2.5" internal and 2 x 2.5" hot swap • 4 x 2.5" internal and 1 x Slim DVD-ROM • 2 x 2.5" internal, 2 x 2.5" hot swap and 1 x Slim DVD-ROM
	Peripheral Drive	Slim DVD-ROM	

Backplane	1 x 16-port 12Gb SATA/SAS backplane with 28-PHY expander chip and 3 SFF-8643 connectors	
Storage Temperature	0°C(32°F) ~ 50°C(122°F)	
Humidity	5%~95% non-condensing	
Gross Weight	(w/ PSU & Rail)	kgs : 34
		lbs : 75
Packaging Dimensions	(W x D x H)	mm : 645 x 835 x 268
		inches : 25.4 x 32.9 x 10.6
Cubic Feet	6.03	
Container Load Quantity	20'	170
	40'	355
	40' H	405
Mounting	Standard	28" tool-less slide rail

Top View

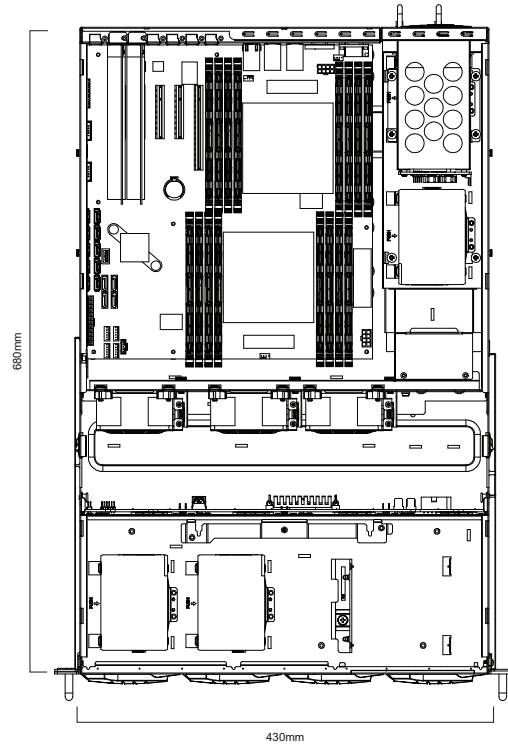

(Power supply is optional. Motherboard is not included.)

Ordering Information

SKU Number	Description
XE1-3ET00-01	3U 16x 3.5" hot-swap bays, tool-less 3.5" and 2.5" HDD tray, 800W CRPS redundant power supply, 4x 2.5" internal SSD top plate, 2x 2.5" hot-swap OS, rail, 3U16 SAS 12G expander controller on backplane (3X series)
XE1-3ET00-02	3U 16x 3.5" hot-swap bays, tool-less 3.5" and 2.5" HDD tray, 800W CRPS redundant power supply, 4x 2.5" internal SSD top plate, 2x 2.5" hot-swap OS, rail, 3U16 SAS 12G passive backplane support 4x NVMe
XE1-3ET00-03	3U 16x 3.5" hot-swap bays, tool-less 3.5" and 2.5" HDD tray, 800W CRPS redundant power supply, 4x 2.5" internal SSD top plate, 2x 2.5" HDD internal OS, rail, 3U16 SAS 12G expander controller on backplane (3X series)

RSC-3ET