



Front View



Optional item - Front door

Features

- Tool-less design supports quick installation and easy maintenance:
 - Tool-less 3.5" & 2.5" drive trays
 - Tool-less top covers
 - Tool-less slide rails
- Supports power cycling on single drive
- Specially designed hot swap and low power consumption fans minimize rotational vibration and provide superior cooling
- 3.5" drive tray comes with 4 screw holes to adapt to 2.5" drive
- Comes with a redundant PSU 80+ Platinum
- One front access USB 3.0 port

Rear View




Specifications

Dimensions (W x D x H)	mm : 430 x 560 x 88		
	inches : 17 x 22 x 3.5		
Industry Standard	EIA-RS310D		
Material	Heavy-duty preplated SPGC cold-rolled steel		
Color	Front Panel : Black		
Cooling	3 x 80x25mm PWM cooling fans		
Power Supply	2U 550W single		
	Options	<ul style="list-style-type: none"> • 2U 550W 1+1 redundant power supply Platinum • 2U 800W 1+1 redundant power supply Platinum 	
Expansion Slots	7 low profile		
Front Panel	System power on/off, system reset, 1 x USB 3.0 port and UID S/W		
LED Indicators	Power, LAN, Drive, Alert and UID		
System Board	Up to 12" x 9.6" ATX / SSI EEB 3.6 compliant MB		
Drive Bays	External	3.5" hot swap	8
		Optional *For XE1-2KTS0-02 / XE1-2KTS0-03	• 2 x 2.5" hot swap (7mm)
	Internal	2.5"	2 (15mm)
		Optional *For all SKUs	• 2 x 2.5" (15mm) • 1 x slim DVD-Rom


Backplane	2 x 4-port SATA/SAS backplanes with SFF-8643 connector	
Storage Temperature	0°C(32°F) ~ 50°C(122°F)	
Humidity	5%~95% non-condensing	
Gross Weight	(w/ PSU & Rail)	kgs : 23.5
		lbs : 51.8
Packaging Dimensions	(W x D x H)	mm : 645 x 835 x 224
		inches : 25.4 x 32.9 x 8.8
Cubic Feet	5.38	
Container Load Quantity	20'	200
	40'	420
	40' H	450
Mounting	Standard	28" tool-less slide rail



Top View

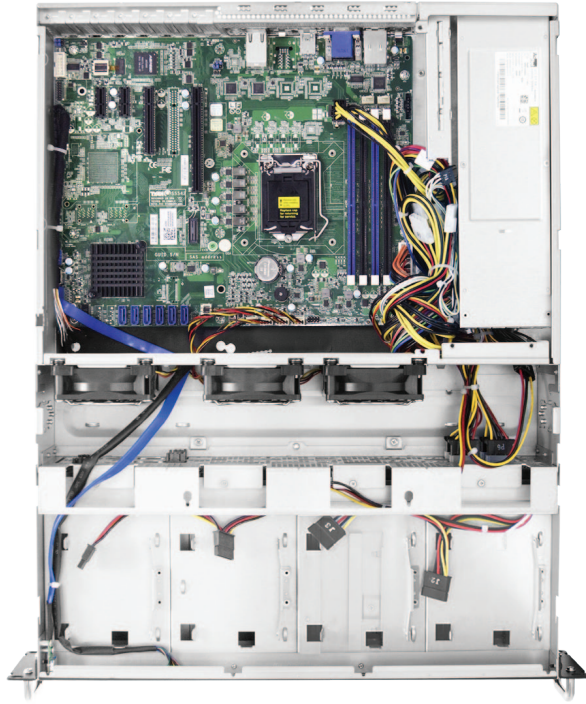

(Power supply is optional. Motherboard is not included.)

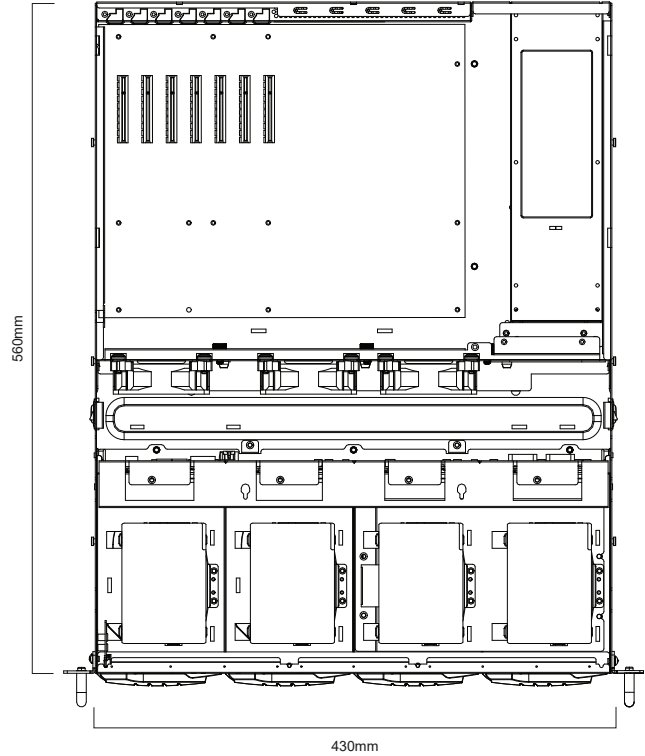

Ordering Information

SKU Number	Description
XE1-2KTS0-01	2U 8x 3.5" hot-swap bays, tool-less 3.5" and 2.5" HDD tray, 550W 2U single power supply, rail, 2x 4-port 12Gb SATA/SAS backplane with SFF-8643 connector
XE1-2KTS0-02	2U 8x 3.5" hot-swap bays, tool-less 3.5" and 2.5" HDD tray, 550W CRPS redundant power supply, 2x 7mm 2.5" hot-swap OS, rail, 2x 4-port 12Gb SATA/SAS backplane with SFF-8643 connector
XE1-2KTS0-03	2U 8x 3.5" hot-swap bays, tool-less 3.5" and 2.5" HDD tray, 800W CRPS redundant power supply, 2x 7mm 2.5" hot-swap OS, rail, 2x 4-port 12Gb SATA/SAS backplane with SFF-8643 connector