



### Front View



Optional item - Front door

### Features

- Tool-less design supports quick installation and easy maintenance:
  - Tool-less 3.5" & 2.5" drive trays
  - Tool-less top covers
  - Tool-less backplane
  - Tool-less slide rails
- 12Gb/s SAS expander chip on backplane
- Specially designed hot swap and low power consumption fans minimize rotational vibration and provide superior cooling
- 3.5" drive tray comes with 4 screw holes to adapt to 2.5" drive
- Comes with a redundant PSU 80+ Platinum
- Two front access USB 3.0 ports

### Rear View




### Specifications

<b>Dimensions</b> (W x D x H)	mm : 430 x 680 x 174.3		
	inches : 16.9 x 26.8 x 6.9		
<b>Industry Standard</b>	EIA-RS310D		
<b>Material</b>	Heavy-duty preplated SPGC cold-rolled steel		
<b>Color</b>	Front Panel : Black		
<b>Cooling</b>	3 x 120x25mm PWM hot swap fans		
<b>Power Supply</b>	1200W 1+1 redundant PSU 80+ Platinum		
<b>Expansion Slots</b>	7 full height		
<b>Front Panel</b>	System power on/off, system reset and 2 x USB 3.0 ports		
<b>LED Indicators</b>	Power, LAN, Drive and Alert		
<b>System Board</b>	12"(W) x 13"(D) E-ATX/SSI EEB 3.6 compliant MB		
<b>Drive Bays</b>	External	3.5" hot swap	24
		2.5" hot swap	Options : • 2 x 2.5" hot swap
	Internal	2.5"	• 2 x 2.5" internal

<b>Backplane</b>	1 x 24-port 12Gb SATA/SAS backplane with 36-PHY expander chip and 3 SFF-8643 connectors	
<b>Storage Temperature</b>	0°C(32°F) ~ 50°C(122°F)	
<b>Humidity</b>	5%~95% non-condensing	
<b>Gross Weight</b>	(w/ PSU & Rail)	kgs : 37
		lbs : 81.6
<b>Packaging Dimensions</b>	(W x D x H)	mm : 645 x 835 x 310
		inches : 25.4 x 32.9 x 12.2
<b>Cubic Feet</b>	8.3	
<b>Container Load Quantity</b>	20'	150
	40'	315
	40' H	345
<b>Mounting</b>	Standard	28" tool-less slide rail

## Top View

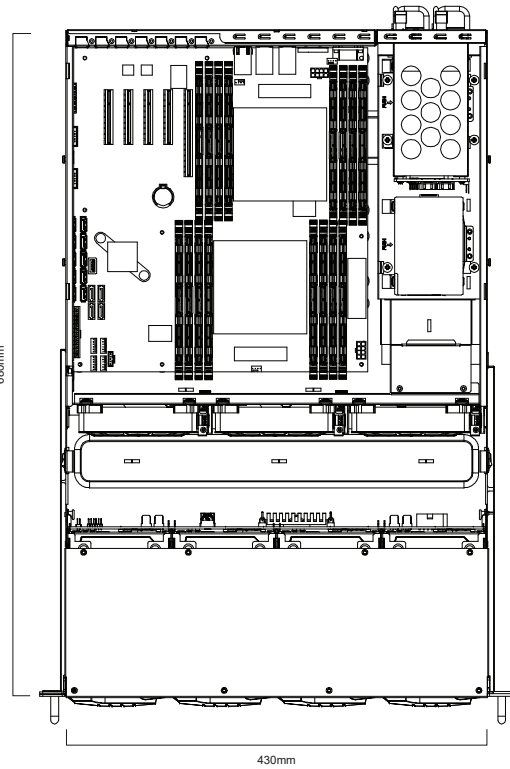

(Power supply is optional. Motherboard is not included.)

## Ordering Information

SKU Number	Description
XE1-4ET00-01	4U 24x 3.5" hot-swap bays, tool-less 3.5" and 2.5" HDD tray, 1200W CRPS redundant power supply, 2x 2.5" hot-swap OS, rail, 4U24 SAS 12G expander controller on backplane (3X series)
XE1-4ET00-02	4U 24x 3.5" hot-swap bays, tool-less 3.5" and 2.5" HDD tray, 1200W CRPS redundant power supply, 2x 2.5" hot-swap OS, rail, 4U24 SAS 12G passive backplane support 4x NVMe