



Front View



Features

- Tool-less design, support quick installation and maintenance (HDD)
- High-density storage server solution in 2U
- 3 drawers to load up to 24 hot swap drives
- Tool-less 3.5" & 2.5" drive trays
- Silicon gaskets to absorb vibration from the sides of the drives

Rear View




Specifications

Dimensions (W x D x H)	mm : 438 x 838 x 88		
	inches : 17.2 x 33 x 3.46		
Industry Standard	EIA-RS310D		
Material	SGCC		
Color	Front Panel : No coating		
Cooling	4 x 60x38mm PWM fans		
Power Supply	800W 1+1 redundant PSU PMBus 1.2 80+ Platinum		
Expansion Slots	7 low profile		
Front Panel	System power switch and system reset switch		
LED Indicators	System power, HDD, LAN 1 and LAN 2		
System Board	Up to 12" x 10.5" ATX M/B		
Drive Bays	Internal	3.5" hot swap	24
	External	2.5" hot swap	2 (7mm SSD)


Backplanes	6 x 4-port SATA/SAS backplanes with SFF-8643 connectors	
Storage Temperature	0°C(32°F) ~ 50°C(122°F)	
Humidity	5%~95% non-condensing	
Gross Weight (w/ PSU & Rail)	kgs :	31
	lbs :	68.35
Packaging Dimensions (W x D x H)	mm :	605 x 1140 x 318
	inches :	23.8 x 35 x 12.5
Cubic Feet	7.9	
Container Load Quantity	20'	126
	40'	266
	40' H	304
Mounting	Standard	33" slide rail



Top View

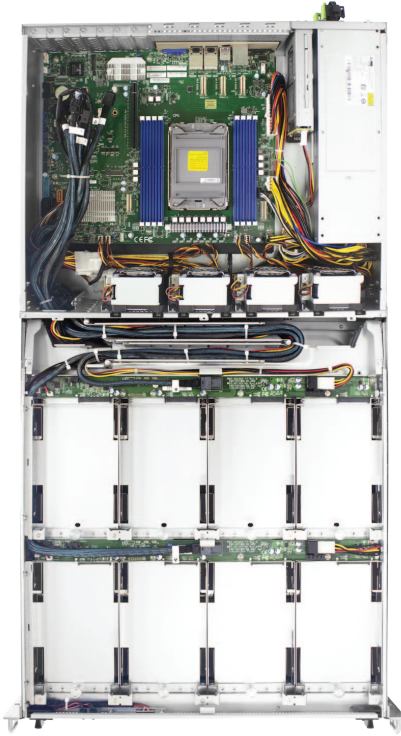

(Power supply is optional. Motherboard is not included.)

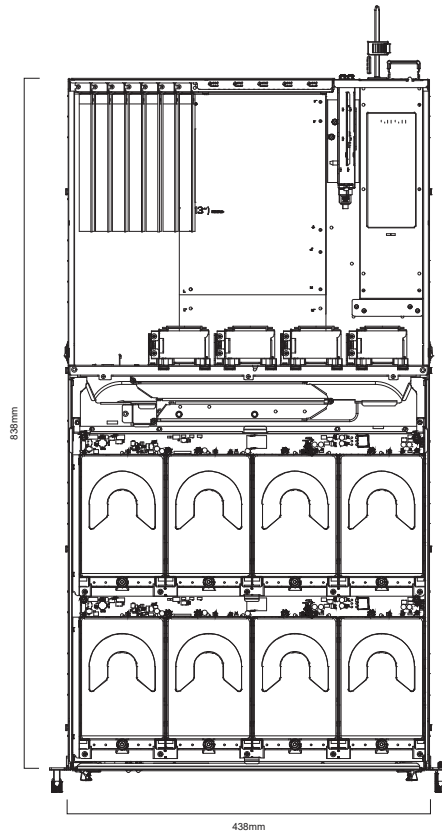

Ordering Information

SKU Number	Description
XE1-2MS00-02	2U chassis 24x 3.5" SAS/SATA hot-swap, 2x 2.5" 7mm SATA hot-swap, 4x 6038 fan module, Acbel 800W redundant power supply, with 6x mini-SAS HD cable (for RAID adapter connection to 24x 3.5" hot-swap), with slide rail
XE1-2MS00-03	2U chassis 24x 3.5" SAS/SATA hot-swap, 2x 2.5" SATA hot-swap, 2x 2.5" NVMe SATA hot-swap, 4x 6038 fan module, 3Y 1U 600W redundant power supply, with 6x mini-SAS HD cable (for RAID adapter connection to 24x 3.5" hot-swap), with slide rail