




Front View

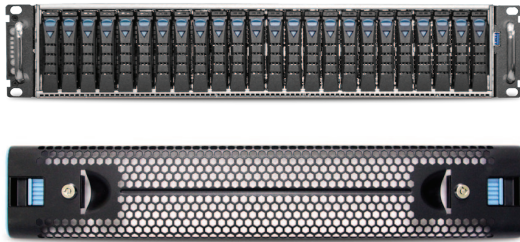

Optional item - Front door

- ### Features
- Tool-less design supports quick installation and easy maintenance:
 - Tool-less 2.5" drive trays
 - Tool-less top covers
 - Tool-less backplane
 - Tool-less slide rails
 - 12Gb/s SAS expander chip on backplane
 - Specially designed hot swap and low power consumption fans minimize rotational vibration and provide superior cooling
 - Comes with a redundant PSU 80+ Platinum

Rear View




Specifications


| | | | |
|----------------------------------|--|---------------|---------------|
| Dimensions (W x D x H) | mm : 430 x 680 x 88 | | |
| | inches : 17 x 26.8 x 3.5 | | |
| Industry Standard | EIA-RS310D | | |
| Material | Heavy-duty preplated SPGC cold-rolled steel | | |
| Cooling | 3 x 80x38mm PWM & low-power consumption hot swap fans | | |
| Power Supply | 800W 1+1 redundant PSU PMBus 1.2 80+ Platinum | | |
| Expansion Slots | 7 low profile | | |
| Front Panel | System power on/off, system reset and 1 x USB 3.0 port | | |
| LED Indicators | Power, LAN, Drive and Alert | | |
| System Board | 12"(W) x 13"(D) E-ATX/SSI EEB 3.6 compliant MB | | |
| Drive Bays | External | 2.5" hot swap | 24 |
| | | | 2 (7mm, rear) |

| | | |
|--------------------------------|-------------------------|--|
| Backplane | Options | 1 x 24-port 12Gb SATA/SAS backplane with 6 SFF-8643 connectors |
| | | 1 x 24-port 12Gb SAS backplane with a 36-PHY expander chip and 3 SFF-8643 connectors |
| Storage Temperature | 0°C(32°F) ~ 50°C(122°F) | |
| Humidity | 5%~95% non-condensing | |
| Gross Weight | (w/ PSU & Rail) | kgs : 24.5 |
| | | lbs : 54 |
| Packaging Dimensions | (W x D x H) | mm : 590 x 850 x 290 |
| | | inches : 23.2 x 33.5 x 11.4 |
| Cubic Feet | 5.14 | |
| Container Load Quantity | 20' | 200 |
| | 40' | 430 |
| | 40' H | 480 |
| Mounting | Standard | 28" tool-less slide rail |

Top View

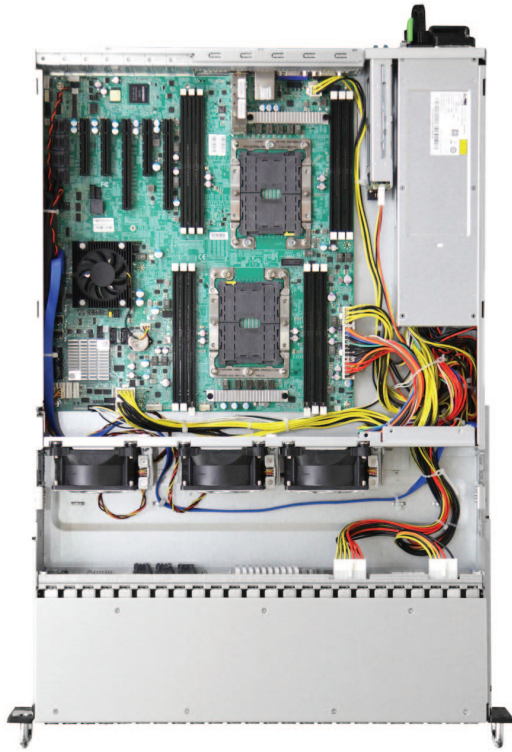

(Power supply is optional. Motherboard is not included.)

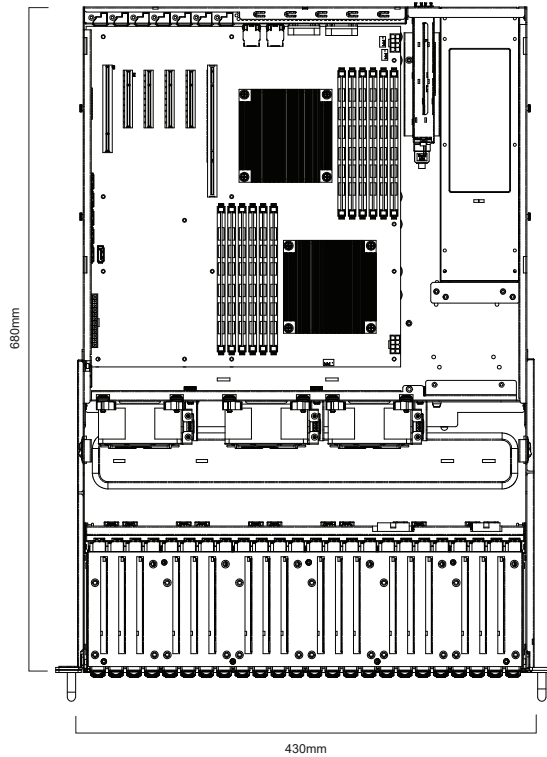

Ordering Information

| SKU Number | Description |
|--------------|--|
| XE1-2AT00-01 | 2U 24x 2.5" hot-swap bays, tool-less 2.5" HDD tray, 800W CRPS redundant power supply, 2x 7mm 2.5" hot-swap OS, low profile rear panel, rail, 2U24 SAS 12G expander controller on backplane (3X series) |
| XE1-2AT00-02 | 2U 24x 2.5" hot-swap bays, tool-less 2.5" HDD tray, 800W CRPS redundant power supply, 2x 7mm 2.5" hot-swap OS, low profile rear panel, rail, 2U24 SAS 12G passive backplane with 6x SFF-8643 connector |