

IPC-C4B (RMC4B2)


Applications

Internet Server (Web / Mail)

CCTV Surveillance DVR

Military Application

Industrial / Telecom Computers

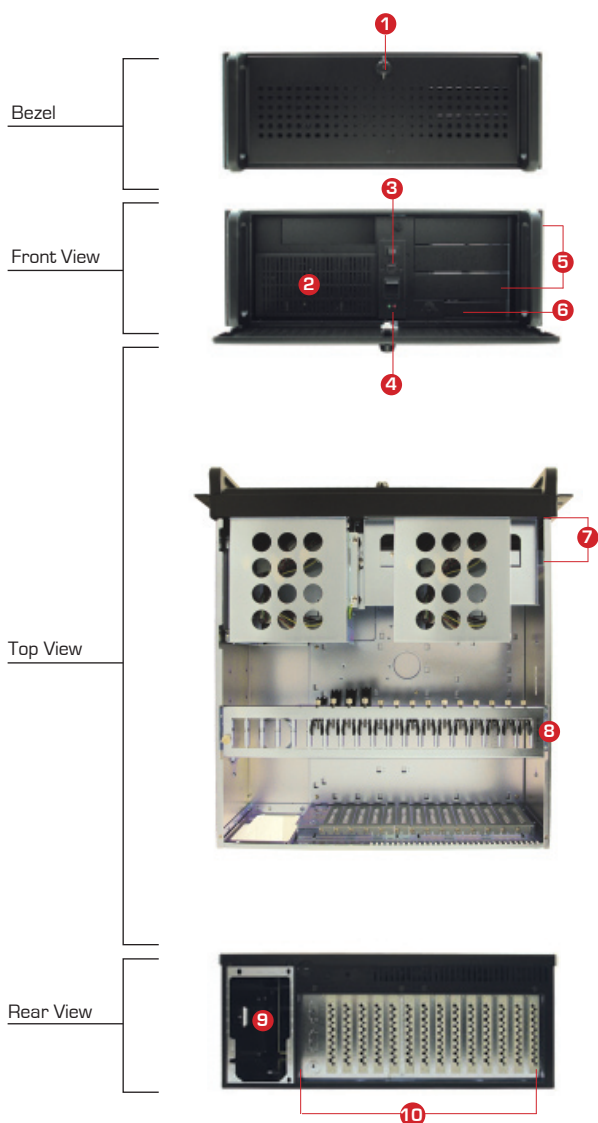

Features & Benefits

- 1 Front bezel with lock for data security and protection
- 2 Removable & washable air filter for dust-free server interior
Superior cooling through front air intake
- 3 Front access dual USB port
- 4 Power on/off, system reset and LEDs for HDD & PWR
- 5 Four(4) external 5.25-inch bays supported
- 6 One(1) external 3.5-inch bay supported
- 7 Two(2) internal 3.5-inch HDD supported
- 8 Hold down bar to ensure that HBA cards are locked into positions
- 9 Single or redundant power supply option
- 10 Fourteen(14) PCI slots for SBC version;
Seven(7) PCI slots for MB version

*Rear view shows RMC4A2-3

IPC-C4B (RMC4B2)

Model Number : C4B (RMC4B2)	
Order Information : IPC-C4B	
Industry Standard : EIA-RS310D	
Materials : Heavy-duty cold-rolled steel	
Finish :	Inside / Body : Zinc-plated with bright chromate
	Outside / Front : Texture-coated
Dimensions : (W x D x H)	mm : 482.6 x 449.6 x 177.8
	inches : 19 x 17.7 x 7
Cooling :	Front: 2 x 92mm ball-bearing fans (+ optional 2 x 60mm exhaust fans)
Power Supply :	● Descriptions
	30T 300W AT
	30X 300W ATX PFC
	35E 350W EPS-12V PFC
	40E 400W EPS-12V PFC
	40R 400W hot-swap redundant PFC
	46E 460W EPS-12V PFC
	50R 500W hot-swap redundant PFC
Expansion : 7 expansion slots for motherboard version, or 14-slot for backplane version	
Controls : Power on/off, system reset, and dual USB port	
Indicators : Power and HDD LED's	

System Board :	▲	Descriptions	
	0	MB Version: Up to 12"(W) x 9.6"(D) ATX compliant MB (Optional 12"(W) x 13"(D) ATX/SSI EEB 3.6 compliant MB)	
	3	BP Version: (SBC)	
Drive Bay :	External	5.25"	4
		3.5"	1
		3.5" hot-swap	0
		2.5" hot-swap	0
	Internal	3.5"	2 (+ 2 optional)
	Slim CD-Rom/DVD-Rom		0
	Slim FDD		0
Temperature : 0°C(32°F) ~ 50°C(122°F)			
Humidity : 5%~95% non-condensing			
Packaging Dimension (W x D x H) :		mm : 620 x 580 x 340	
Cubic Feet : 4.3			
Reference Container Loading :	20'	238	
	40'	477	
	40' H	545	
Mounting Options :	BR-2U03		BR-2U05
	SR-20		SR-26

Note: Please turn to page 147 for Mounting Options Matrix

Mechanical Drawing

