




Front View

24 x 2.5" hot swap drive bays

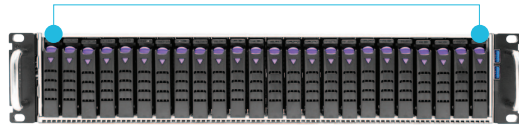

Features

- Tool-less design supports quick installation and easy maintenance:
 - Tool-less 2.5" drive trays
 - Tool-less top covers
 - Tool-less slide rails
- Flexible backplane support
- 12Gb/s SAS3 / 24Gb/s SAS4 expander chip / NVMe tri-mode on backplane
- Specially designed hot swap and low power consumption fans minimize rotational vibration and provide superior cooling
- 80+ Platinum redundant power supply

Rear View




Specifications

Dimensions (W x D x H)	mm : 430 x 645 x 88		
	inches : 17 x 25.4 x 3.5		
Industry Standard	EIA-RS310D		
Material	Heavy-duty preplated SGCC cold-rolled steel		
Color	Front Panel : Black		
Cooling	3 x 80x38mm easy swap fans		
Power Supply	1200W 1+1 redundant PSU PMBus 1.2 80+ Platinum		
Expansion Slots	7 low profile		
Front Panel	System power on/off, system reset and 2 x USB 3.0 ports		
LED Indicators	Power, LAN, Drive and Alert		
System Board	12"(W) x 13"(D) E-ATX/SSI EEB 3.6 compliant MB		
Drive Bays	External	2.5" hot swap	24 x SATA/SAS3/SAS4/NVMe (15mm, front)
			2 x 2.5" hot swap (7mm, rear)

Backplane	• SKU1: 1 x 24-port SAS3 expander backplane,	
	• SKU2: 3 x 8-port SAS3 backplane,	
	• SKU3: 1 x 8-port SAS3/PCIe Gen4 NVMe tri-mode backplane, 2 x 8-port SAS3 backplane	
	• SKU4: 2 x 8-port SAS3/PCIe Gen4 NVMe tri-mode backplane, 1 x 8-port SAS3 backplane	
	• SKU5: 3 x 8-port SAS3/PCIe Gen4 NVMe tri-mode backplane	
	• SKU6: 1 x 24-port SAS4 expander backplane	
Storage Temperature	0°C(32°F) ~ 50°C(122°F)	
Humidity	5%~95% non-condensing	
Gross Weight	(w/ PSU & Rail)	kgs : 24.5
		lbs : 54
Packaging Dimensions	(W x D x H)	mm : 645 x 835 x 230
		inches : 25.4 x 32.9 x 9.06
Cubic Feet	4.37	
Container Load Quantity	20'	200
	40'	430
	40' H	480
Mounting	Standard	28" tool-less slide rail

Top View

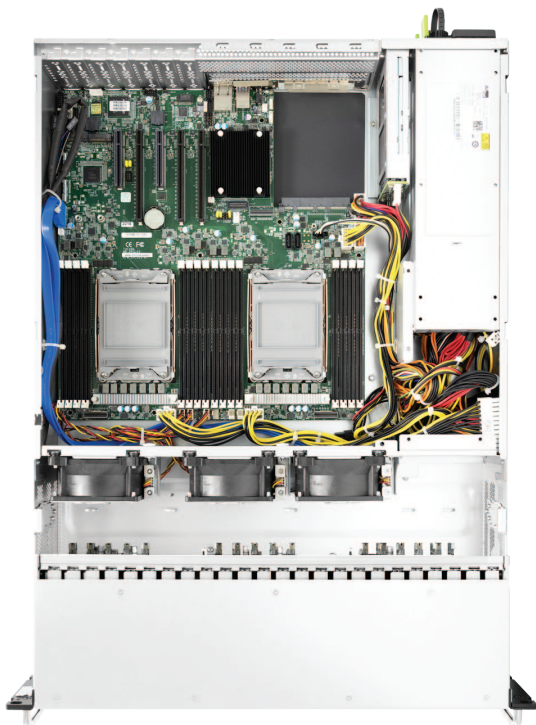

(Motherboard is not included.)

