




Front View

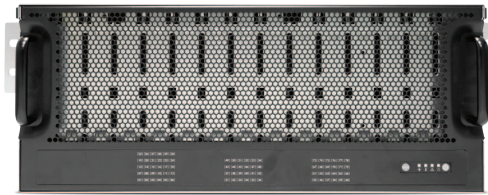

Features

- Intelligent Enclosure Management
- Individual drive power management
- Hot swap design for easy maintenance and management
- Enclosure Cable Management Kit
- Tool-less drive trays
- Designed for 1000mm depth rackmount server cabinet

Rear View



Specifications

General	Number of Expander	Single/Dual
	Expander Chip	Hub: SAS4x48 Edge: SAS35x40 & SAS35x36/SAS4x40 & SAS4x32
	Host/Expansion Interface	4 x Mini-SAS HD (SFF-8674) per expander module (backward compatible with SFF-8644 SAS12G)
Drives Supported	Drive Interface	• 24Gb & 12Gb SAS if using dual expanders • 24Gb & 12Gb SAS + 6Gb SAS/SATA if using single expander
	Form Factor	3.5" / 2.5" (with optional kit)
Administration / Management	Admin/Firmware Upgrade	• In-band • IEM port
	LED Indicators, Audible Alarm	Yes
Hot swap and Redundancy	Drive Bays	78
	Cooling	• 8 x 60x56mm hot swap fans • 1 x 40x56mm fan per expander module
	Power Supply	1600W 1+1 hot swap redundant 80+ Platinum/Titanium
	Power Entry	Dual AC Inlet
	Expander Modules	Dual SAS topology (Optional)

Electrical and Environmental	AC Input	Platinum: 200-240Vac , 50/60Hz, 12A (1600W) Titanium: 200-240Vac , 50/60Hz, 10A (1600W)
	Operating Environment	• Temperature : 0°C to 35°C • Relative humidity : 20% to 80%
	Non-operating Environment	• Temperature : -20°C to 60°C • Relative humidity : 10% to 90%
Physical Specification	Dimensions (W x D x H)	mm : 434 x 810.5 x 176 434 x 974.7 x 176 (with CMA) inches : 17 x 31.9 x 7 17 x 38.4 x 7 (with CMA)
	Gross Weight (w/ PSU, Rail and Pallet; w/o Disks)	kgs : 57.67 lbs : 127.1
	Packaging Dimensions (W x D x H)	mm : 675 x 1120 x 536 inches : 26.6 x 44.1 x 21.1
Mounting	Standard	31" slide rail
	Option	Cable Management Kit

Ordering Information

SKU Number	Description
XJ1-40782-01	4U 78x 3.5" HS bays, HS JBOD w/ single SAS 12G edge/24G hub expander controller, single BMC, tool-less HDD tray, 1600W 1+1 HS redundant 80+ Platinum (C14 inlet/185mm), tool-less rail kit
XJ1-40782-02	4U 78x 3.5" HS bays, HS JBOD w/ dual SAS 12G edge/24G hub expander controller, dual BMC, tool-less HDD tray, 1600W 1+1 HS redundant 80+ Platinum (C14 inlet/185mm), tool-less rail kit
XJ1-40782-03	4U 78x 3.5" HS bays, JBOD w/ single SAS 12G edge/24G hub expander controller, single BMC, tool-less HDD tray, 1600W 1+1 HS redundant 80+ Titanium (C14 inlet), tool-less rail kit
XJ1-40782-04	4U 78x 3.5" HS bays, JBOD w/ dual SAS 12G edge/24G hub expander controller, dual BMC, tool-less HDD tray, 1600W 1+1 HS redundant 80+ Titanium (C14 inlet), tool-less rail kit
XJ1-40782-05	4U 78x 3.5" HS bays, JBOD w/ single SAS 24G edge/hub expander controller, single BMC, tool-less HDD tray, 1600W 1+1 HS redundant 80+ Platinum (C14 inlet), tool-less rail kit
XJ1-40782-06	4U 78x 3.5" HS bays, JBOD w/ dual SAS 24G edge/hub expander controller, dual BMC, tool-less HDD tray, 1600W 1+1 HS redundant 80+ Platinum (C14 inlet), tool-less rail kit
XJ1-40782-07	4U 78x 3.5" HS bays, JBOD w/ single SAS 24G edge/hub expander controller, single BMC, tool-less HDD tray, 1600W 1+1 HS redundant 80+ Titanium (C14 inlet), tool-less rail kit
XJ1-40782-08	4U 78x 3.5" HS bays, JBOD w/ dual SAS 24G edge/hub expander controller, dual BMC, tool-less HDD tray, 1600W 1+1 HS redundant 80+ Titanium (C14 inlet), tool-less rail kit