



康舒科技

ACBEL POLYTECH INC.

Approval Sheet

Model No. : FSN011 Option 4QLG
MKT Model No. : R2CU4202A Option P4QL
Hardware Rev. : A00
Software Rev. : APM12V0005

Customer : **PCICASE UK LTD**
Customer PN : PIZ22XXR-95-ACB-ES-H

Approval by : **Daniel Hsieh**

Prepare by : Vicki Wu

Date: 08/13/2026

Approval Sheet History Log

[illegible]



康舒科技

ACBEL POLYTECH INC.

Contents

1. Specification
- 2. Mechanical Outline Drawing**
- 3. I/O Label Drawing**



康舒科技

ACBEL POLYTECH INC.

Specification



ACBEL POLYTECH INC.

CRPS 2U 1+1 Series

Power Distribution Board Specification

Model Number: R2CU4202A

AcBel PN: FSN011-000G

Compatible with R1C series PSU :

AC: 2000W (FSM033, FSM005)

Revision: S00

Release Date: 2023/01/17

Released by: Larry Chang

Change Date:

Changed by:

1. GENERAL SCOPE

This specification describes the performance characteristic of a DC-DC switching power distribution board (PDB) with a +12V main DC input and a +12Vsb auxiliary input. The PDB will switch into +5V, +3.3V main and +5Vsb auxiliary output and distribute +12V main output. The PDB operates with a single power supply or in 1+1 parallel. Power modules shall support hot-plug and active load share for 12V Main output. Mixed operation of different input type power modules (AC-DC and DC-DC) is allowed. The purpose of this document is to define general requirements for power modules. That may not be included in the engineering specification for that product. In case of conflict, the engineering specification supersedes this document unless this document in the area of conflict specifically states that it supersedes the engineering specification.

2. ELECTRICAL PERFORMANCE

2.1 POWER BUS AND SIGNAL CONNECTOR

The PDB shall have a common Power Bus and signal connector complying to FCI PCE interconnect series. The exact PN for interconnect is **FCI PN 10035388-102LF (RA) or ALLTOP C21009-102H3-Y or equivalent.**

The Pin definition shall comply with chapter 11.2 and shall provide +12VDC as main input and +12Vsb DC as auxiliary input.

2.2 POWER INPUT SPECIFICATION

2.2.1 Input Voltage/Currents

The maximum input current defines the maximum possible input current to ensure the proper function of the PDB to meet all defined specifications.

INPUT VOLTAGE		INPUT CURRENT	MAX POWER
12VDC	1600W	132A	1600W
	2000W	164A	2000W
12V _{SB} DC		3A	36W

2.2.2 Line dropout (*Refer to Power Module*)

An Input line dropout is a transient condition defined as the line input to the power supply drops to 0 VAC at any phase of the AC line or DC line, for any length of time. During an Input dropout the power supply must meet dynamic voltage regulations requirements. An Input line dropout of any duration shall not cause dripping of the control signals and protection circuits. If the Input dropout lasts longer than the holdup time, the power supply should recover when VIN meets VIN_{recover} and meet all turn on requirements. An Input dropout of any length shall not cause any damage to the power supply.

Holdup time until Power output goes out of regulations

Loading	Main output	Standby output
80%	12mS	70mS

2.2.3 Efficiency of DC to DC converter

The efficiency of 3.3V and 5V DC to DC converter should meet the efficiency requirements. It's based on without cable no matter input is 230VAC or 115VAC:

Output Voltage	Load	Minimum Efficiency
5V	50%	94%
3.3V	50%	94%

2.2.4 AC Line Transient Specification (*refer to power module*)

AC line transient conditions shall be defined as “sag” and “surge” conditions.

“Sag” conditions are also commonly referred to as “brownout”, these conditions will be defined as the AC line voltage dropping below nominal voltage conditions.

“Surge” will be defined to refer to conditions when the AC line voltage rises above nominal voltage.

The power supply shall meet the requirements under the following AC line sag and surge conditions.

AC Line SAG and SURGE transient performance.

AC Line Sag (10sec interval between each sagging)

Duration	Sag	Operating AC voltage	Line frequency	Performance criteria
0 to 1/2 AC cycle	95%	Nominal AC Voltage ranges	50/60Hz	No loss of function or performance
>1 AC cycle	>30%	Nominal AC Voltage ranges	50/60Hz	Loss of function acceptable, self-recoverable
Continues	10%	Nominal AC Voltages	50/60Hz	No loss of function or performance
0 to 1/2 AC cycle	30%	Mid-point of nominal AC Voltages	50/60Hz	No loss of function or performance

2.2.5 Power Recovery

The power supply shall recover automatically (auto recover) after an Input power failure. Input power failure is defined to be any loss of Input power that exceeds the dropout criteria.

2.2.6 Input Line Leakage Current (*Refer to Power module*)

The maximum leakage current to ground for power supply system shall not exceed 3.5mA when tested at 230VAC Input voltages.

2.3 POWER OUTPUT SPECIFICATION

2.3.1 Output Power/Currents

The following table defines the power and current rating of the **R2C** power supply series. The combined output power of all outputs shall not exceed the maximum rated output power, if a combined power rating is specified. The power supply must meet both static and dynamic voltage regulation requirements.

Voltage		Min	Max	Peak
+3.3V		0.1A	18A	20A
+5V		0.1A	24A	28A
+12V	1600W	1A	132A	Follow PSU
	2000W	1A	164A	Follow PSU
+5Vsb		0.1A	4A	5.2A

1. Maximum continuous total DC output power should not exceed single PSU max power rating even though in 1+1 parallel condition.
2. Maximum continues combined load on +3.3Vdc and +5Vdc outputs shall not exceed 140W.
3. Maximum peak total DC output power should not exceed 1.2 times of PSU output.

2.3.2 Voltage Regulation

The power supply shall stay within the following voltage limits when operating at steady state and dynamic loading conditions. These limits include the peak-peak ripple/noise conditions specified in paragraph 2.3.7. All outputs are measured with reference to the return remote sense (ReturnS) signal.

Parameter	MIN	NOM	MAX	Units	Tolerance
+3.3V	+3.13	+3.30	+3.47	V _{rms}	+/-5%
+5V	+4.75	+5.00	+5.25	V _{rms}	+/-5%
+12.2V	+11.59	+12.20	+12.81	V _{rms}	+/-5%
+5Vsb	+4.75	+5.00	+5.25	V _{rms}	+/-5%

2.3.3 Dynamic Loading

The power supply shall operate within specified limits and meet regulation requirements for step loading and capacitive loading specified below.

The load transient repetition rate shall be tested between 50Hz to 5kHz at duty cycles ranging from 10%-90%. The load transient repetition rate is only a test specification. The Δ step load may occur anywhere within the 1A and the MAX load for main output. The Δ step load may occur anywhere within the Min and the MAX load for standby

Output	△Step Load Size	Load Slew Rate	Capacitive Load
+3.3V	30% of max load	0.5 A/μs	1000 μF
+5V	30% of max load	0.5 A/μs	1000 μF
+12V	60% of max load	0.5 A/μs	2200 μF
+5Vsb	25% of max load	0.5 A/μs	1 μF

2.3.4 Capacitive Loading

The power supply shall meet all requirements with the following capacitive loading ranges.

Output	MIN	MAX	Units
+3.3V	10	12,000	μF
+5V	10	12,000	μF
+5Vsb	1	350	μF
+12V	follow PSU	follow PSU	μF

2.3.5 Maximum Load Change

The power supply shall continue to operate normally when there is a step change ≤ 1 A/μsec between minimum load and maximum load.

2.3.6 Closed loop stability


The power supply shall be unconditionally stable under all line/load/transient load conditions including capacitive load ranges specified in Section 2.3.4 and meet a minimum of: 45 degrees phase margin and -6dB-gain margin.

2.3.7 Ripple and Noise

Ripple and Noise shall be measured over a Bandwidth of 20MHz at the power supply output connector. A 0.1μF ceramic capacitor and 10μF of tantalum capacitor shall be placed at each point of measurement.

+3.3V	+5V	+5Vsb	+12V
50 mVp-p	50 mVp-p	50 mVp-p	120 mVp-p

The test set-up shall be as shown below:

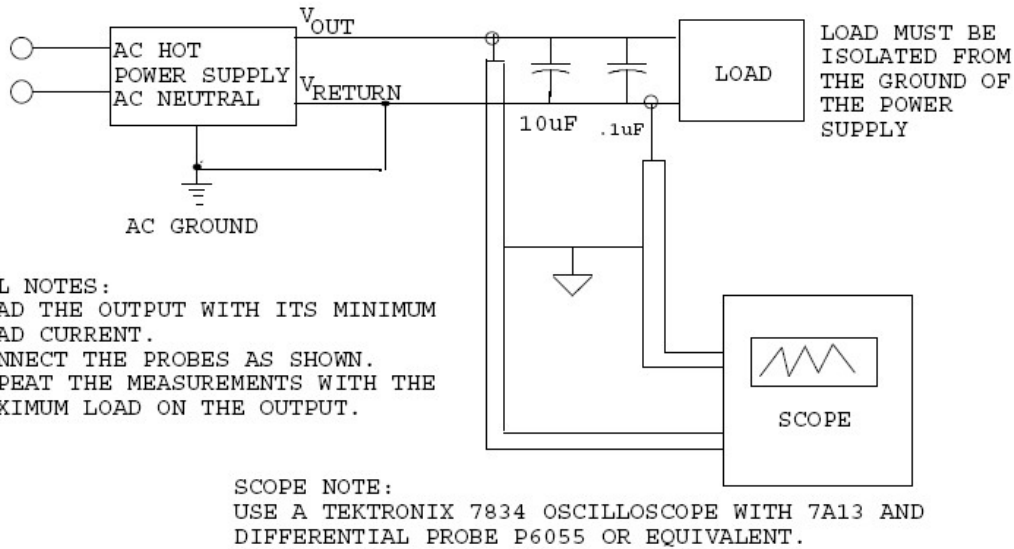

3. TIMING REQUIREMENTS


These are the timing requirements for the power supply operation. The output voltages must rise from 10% to within regulation limits (T_{vout_rise}) within 5 to 70ms. For 5Vsb, it is allowed to rise from 1 to 25ms. All main outputs shall rise positive monotonically and have a slope value between 0 V/mS to 0.1V/mS.

For 5Vsb output any 5ms segment of the 10% to 90% rise time waveform, a straight line draw between the end points of the waveform segment must have a slope $\geq [V_{out, nominal} / 20]$ V/mS.

Each output voltage shall reach regulation within 50mS (T_{vout_on}) of each other during turn on of the power supply system. Each output voltage shall fall out of regulation within 400mS (T_{vout_off}) of each other during turn off.


Table below shows the timing requirements for the power supply being turned on and off via the input power, with PSON held low and the PSON signal, with the input power applied.

Item	Description	MIN	MAX	Units
T_{vout rise}	Output voltage rise time for all main output	5	70	ms
	Output voltage rise time for the 5Vsb output	1	25	ms
T_{vout_on}	All main outputs must be within regulation of each other within this time.		50	ms
T_{vout_off}	All main outputs must leave regulation within this time.		400	ms

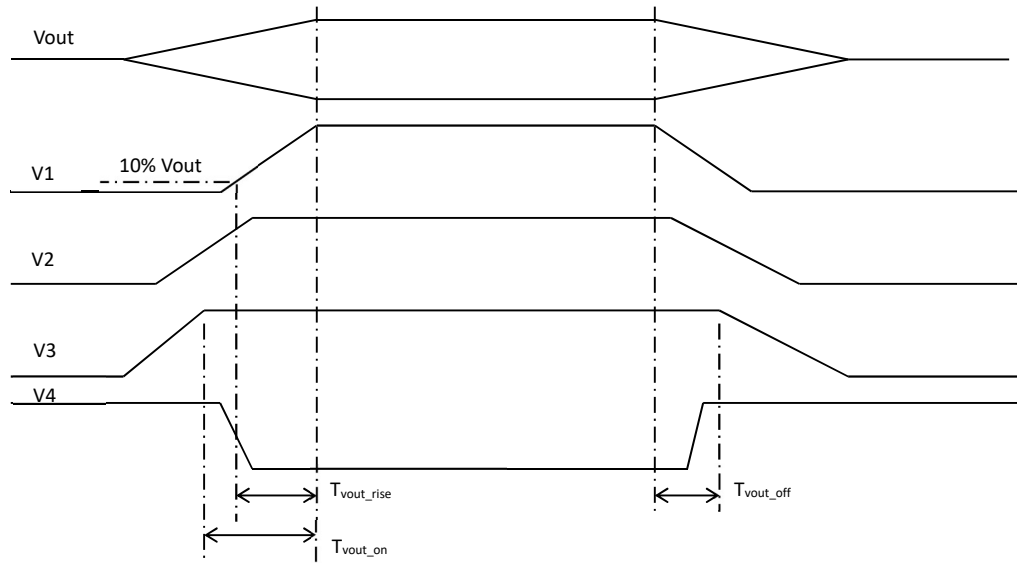Output Voltage Timing**Turn On/Off Timing**

Item	Description	MIN	MAX	UNITS
T_{sb_on_delay}	Delay from ac begin applied to 5Vsb begin within regulation.		1500	ms
T_{ac_on_delay}	Delay from AC begin applied to all output voltage begin within regulation.		2500	ms
T_{out_holdup}	Time all output voltages stay within regulation after loss of AC.	14		ms
T_{pwok_holdup}	Delay from loss of AC to de-assertion of PWOK in single PSU operation mode.	12		ms
T_{pson_on_delay}	Delay from PSON [#] active to output voltages within regulation limits.	5	400	ms
T_{pson_pwok}	Delay from PSON [#] de-active to PWOK begin de-asserted.		50	ms
T_{pwok_on}	Delay from output voltages within regulation limits to PWOK asserted at turn on.	100	500	ms
T_{pwok_off}	Delay from PWOK de-asserted to output voltages (3.3V, 5V, 12V) dropping out of regulation limits.	1		ms
T_{psok_low}	Duration of PWOK begin in the de-asserted state during an off/on cycle using AC or the PSON [#] signal.	100		ms
T_{sb_vout}	Delay from 5Vsb begin in regulation to O/Ps begin in regulation at AC turn on.	50	1000	ms

Turn On/Off Timing (single Power supply)

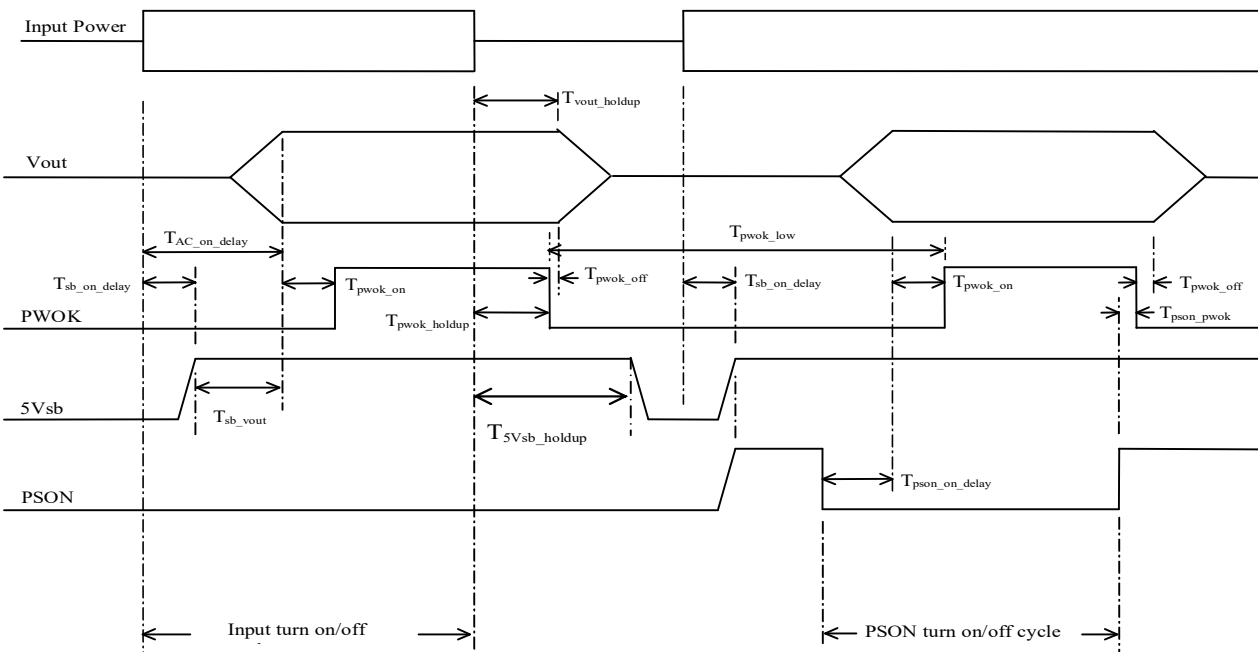

4. CONTROL AND INDICATOR FUNCTIONS

The following section defines the input and output signals from the power supply. Signals that can be defined as low true use the following convention: Signal# = low true.

4.1 PSON# INPUT SIGNAL (POWER SUPPLY ENABLE)

The PSON# signal is required to remotely turn on/off the main output of the power supply. PSON# is an active low signal that turns on the main output power rail. When this signal is not pulled low by the system or left open, the outputs (except the Standby output) turn off. PSON# is pulled to a standby voltage by a pull-up resistor internal to the power supply.

PSON# Signal Characteristic

Signal Type	+3.3V TTL Compatible output signal	
PSON# = Low	ON	
PSON# = High or Open	OFF	
	MIN	MAX
Logic level low (power supply ON)	0V	1.0V
Logic level high (power supply OFF)	2.0V	3.46V
Source current, $V_{psn} = \text{low}$		1.1mA
Power up delay: $T_{psn_on_delay}$	5ms	400ms
PWOK delay: T_{psn_pwok}		50ms
$T_{psn} = \text{Delay PSON\# disconnect MO OFF}$		100μsec

4.2 POWER OK (PWOK OR PG) BUS

PWOK is a power good signal and shall be pulled HIGH by the power supply to indicate that all outputs are within regulation limits. When any output voltage falls below regulation limits, an internal failure or when AC power has been removed for a time sufficiently long, so that power supply operation is no longer guaranteed, PWOK will be de-asserted to a LOW state. The start of the PWOK delay time shall inhibited as long as any power supply output is in current limit.

PWOK / PG Signal Characteristics

Signal Type	+3.3V TTL Compatible output signal	
PWOK = High	Power OK	
PWOK = Low	Power Not OK	
	MIN	MAX
Logic level low voltage, $I_{\text{sink}} = 4\text{mA}$	0V	1V
Logic level high voltage, $I_{\text{source}} = 200\mu\text{A}$	2.4V	3.46V
Sink current, PWOK = low		4mA
Source current, PWOK = high		2mA
PWOK delay: $T_{\text{pwok_on}}$	100ms	500ms
PWOK rise and fall time		100μsec
Power down delay: $T_{\text{pwok_off}}$	1ms	

4.3 Optional SIGNALS

There're four option signals defined, all signal characteristics be described in form as below, those high voltage level should be pulled-up from PDB as 3.3V

option signal	PS_ON = High	PS_ON = Low	Assert during PS_ON = Low	Assert condition	de-assert condition
Alert	H	H	L	anyone PSU assert Alert (please refer to PSU SPEC)	AC cycle or PS_ON/FF cycle
Alarm	L	L	H	PDB fail or anyone PSU fail when 1+1 parallel condition	AC cycle or PS_ON =High
TTL	H	H	L	PDB fail or anyone PSU fail when 1+1 parallel condition	AC cycle or PS_ON =High
Buzzer			Beep	PDB fail or anyone PSU fail when 1+1 parallel condition	AC cycle 、 PS_ON/FF cycle or go back to 1+1 parallel normal condition
Mute	When the buzzer is enabled, this signal is shorted to ground and the buzzer will be disabled.				

5. PROTECTION CIRCUITS

Protection circuits shall cause only the power supply's main outputs to shutdown (latch off).

If the power supply latches off due to a protection circuit tripping, an AC cycle OFF for 15 second or a PSON# cycle HIGH for 1 second must be able to reset the power supply.

The auxiliary output shall not be affected by any protection circuit, unless the auxiliary output itself is affected.

5.1 CURRENT LIMIT

The power supply shall prevent the main and auxiliary outputs from exceeding the values shown in below Table. If the main current limits are exceeded the power supply will shut down and latch off, *the auxiliary output shall be auto recover (Vsb_{AR}) after the OCP/SCP had been removed.*

Over Current Protection

Voltage	Over Current Limit (Iout limit)
+3.3V	110% minimum, 150% maximum
+5V	110% minimum, 150% maximum
+5Vsb (<i>Auxiliary</i>)AR	110% minimum, 150% maximum

5.2 OVER VOLTAGE PROTECTION

The power supply shall shutdown and latch off after an over voltage condition occurs. This latch will be cleared by toggling the PSON# signal or by an AC power interruption.

Over Voltage Limits

Output Voltage	MIN (V)	MAX (V)
+3.3V	3.6	4.6
+5V	5.5	6.6
+12V	follow PSU	follow PSU
+5Vsb (<i>Auxiliary</i>)AR	5.5	6.6

5.3 OVER TEMPERATURE PROTECTION

The PDB shall have thermal sensors to measure the internal environmental (T_{env}). The thermal sensors shall be part of a protection circuit to protect against over temperature conditions caused by loss of fan cooling or excessive ambient temperature. In a critical over temperature condition, specified in below table, the power system shall be shutdown with the exception of the *auxiliary output (Vsb_{AR})*.

The Thermal CLST shall be part of the OTP_{AR} .

The PDB will auto recover the power system from this condition, when the temperature is dropping within specification again.

Condition	Warning in °C	Critical in °C	Timing for SMBAlert [#] /LED
T _{env}	60	65	follow PSU

T_{env}: PDB internal Environment Temperature

6. POWER SUPPLY MANAGEMENT

6.1 I²C Bus Noise Requirement

The power supplies I²C Bus' SDA and SCL line shall be clean from noise, which might affect the proper function when utilized with other devices.

The maximum allowed line noise on SDA or SCL is 400mV.

6.2 Address Command

It shall be located at the address set by the A0 and A1 pins.

The PDB Addressing can be changed by utilizing the MFR_CONFIG_ADDRESS command.

PDB position and PSMC address	PM1 B0h/B1h	PM2 B2h/B3h
Pin A0/A1	0/0	1/0

7. ENVIRONMENTAL

7.1 TEMPERATURE REQUIREMENTS

The power supply shall operate within all specified limits over the Top temperature range. The average air temperature difference (ΔT_{ps}) from the inlet to the outlet of the power supply shall not exceed the values shown below Table. All airflow shall pass through the power supply and not over the exterior surfaces of the power supply

ITEM	DESCRIPTION	MIN	MAX	UNITS
Top	Operating temperature range.	0	50	°C
T _{non-op}	Non-operating temperature range.	-40	70	°C

7.2 HUMIDITY

Operating: 20% to 85% relative humidity, non-condensing.

Storage: 10% to 90% relative humidity, non-condensing.

7.3 ALTITUDE

Operating: meet up to new CCC 5,000m requirement.

7.4 VIBRATION

Operating: 0.01G²/Hz at 10Hz, 0.02G²/Hz at 20Hz.

Non-Operating: 0.02G²/Hz form 20Hz to 1000Hz.

7.5 MECHANICAL SHOCK

Operating: 5G, no malfunction.

Non-operating: 50G, no damage. Trapezoidal Wave, Velocity change = 4.3m/sec. Three drops in each of six directions are applied to each of the samples.

7.6 EMI/EMC REQUIREMENTS

The power supply shall comply with FCC part 15, CRISP 22 and EN55-22; Class A for both conducted and radiated emissions. Test shall be conducted using a shielded DC output cable to a shielded load. The load shall be adjusted to 100% load. Tests will be performed full load on each output power at 120VAC, 60Hz, and 230VAC, 50Hz.

8. REGULATORY REQUIREMENTS

8.1 MAXIMUM LEAKAGE CURRENT TO GROUND

Less than 3.5mA for entire power system at 230VAC/50Hz

8.2 ELECTROSTATIC DISCHARGE

The objective of ESD test is to determine the susceptibility and immunity of products to electrostatic discharge to which the products may be exposed, when operating under all potential environmental conditions. The test conditions and setup shall conform to that outlined in CISPR24-2 and IEC 801-2 (EN55101-2).

Air discharge: 8KV not allow error.

Contact discharge: 4KV not allow error.

Note: The above test discharge time is 1 time/sec and repeats each test 10 times.

9. RELIABILITY

The MTBF of the power supply can be calculated with the Part-Stress Analysis method of Bell Core SR-332 Issue 1 using the quality factors. A calculated MTBF of the power supply shall be at least 100,000 hours at 40 °C ambient with 115VAC and in full load condition.


10. RoHS COMPLIANCE

The directive 2002/95/EC of the European Parliament and of the Council of the 27th January 2003, on the restriction of the use of certain hazardous substances in electrical and electronic equipment, requires the reduction of the substances Lead, Mercury, Cadmium, Hexavalent Chromium, Polybrominated Biphenyls (PBB), and Polybrominated Biphenyl ethers (PBDE) in electronic products by July 1, 2006. Unless otherwise noted, all materials used will be compliant with this directive and any subsequent revisions or amendments.

11.MECHANICAL DIMENSIONS

11.1 POWER DISTRIBUTION CAGE DIMENSIONS

Dimension (L x W x H): 220 x 76.9 x 84mm / 10.43 x 3.03 x 3.31inch

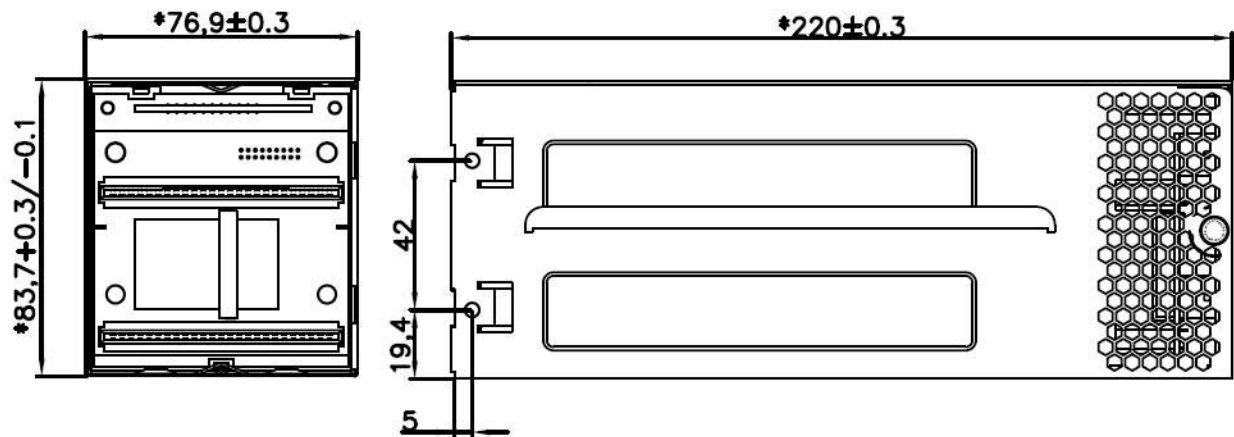

Note: Above drawing for reference only, detail drawing refer to mechanical drawing

11.2 DC Output connector

The power supply shall use a card edge output connection for power and signal that is compatible with a 2x25 Power Card Edge connector

Gold finger pin assignment
OUTPUT PIN ASSIGNMENT (*Refer to Power Module*)

PIN	SIGNAL_NAME	PIN	SIGNAL_NAME
A1	GND	B1	GND
A2	GND	B2	GND
A3	GND	B3	GND
A4	GND	B4	GND
A5	GND	B5	GND
A6	GND	B6	GND
A7	GND	B7	GND
A8	GND	B8	GND
A9	GND	B9	GND
A10	+12V	B10	+12V
A11	+12V	B11	+12V
A12	+12V	B12	+12V
A13	+12V	B13	+12V
A14	+12V	B14	+12V
A15	+12V	B15	+12V
A16	+12V	B16	+12V
A17	+12V	B17	+12V
A18	+12V	B18	+12V
A19	PMBus SDA	B19	A0 (SMBus address)
A20	PMBus SCL	B20	A1 (SMBus address)
A21	PSON [#]	B21	12VSB
A22	SMB Alert [#]	B22	CR_BUS
A23	Return Sense	B23	12V load share Bus
A24	+12V Remote Sense	B24	Present [#]
A25	PWOK	B25	VIN_GOOD

11.3 BRACKET OPTIONS




Per customer requirements.



康舒科技


ACBEL POLYTECH INC.

Mechanical Outline Drawing

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16																																																
A	NOTE: 1 ENCLOSURE MATERIAL : SGCC G30(COMPLY WITH ASTM A653 G30). 72 HOURS MINIMUM WHITE RUST PROTECTION IN SALT SPRAY (ASTM B117),MATERIAL MUST MEET DC RESISTANCE 0.1 OHMS MAX. FOR ELECTRICAL CONDUCTIVITY REQUIREMENTS 機殼材質: SGCC(熱浸鋅鋼板)G30(符合ASTM A653 G30) 至少72小時鹽霧防鏽處理(ASTM B117), 材料傳導率DC阻 抗需小於 0.1 OHMS MAX																																																															
B																																																																
C	2 ALL EXPOSED EDGES MUST BE MEET HANDLING REQUIREMENTS SPECIFIED IN UL 1439 AND DO NOT CUT THROUGH THE FIRST LAYER OF THE TESTER 所有可能被觸碰的邊緣必須符合 UL1439 觸摸安全需求, 不可以刮破檢測物的第一層																																																															
D	3 FAI"Ⓜ", CPK"Ⓜ", "Ⓜ" "CRITICAL DIMENSIONS MUST BE INSPECTED FOR EVERY SHIPMENT. FAI"Ⓜ", CPK"Ⓜ", "Ⓜ"表示該(尺寸/位置)為設計之重點尺寸 而且可能會有變異,每次出貨前必須檢驗合格.																																																															
E	4 DO NOT ALLOW SCRATCH ON THE SURFACE. EXTRUDE PORTION SHOULD PREVENT THE DAMAGE OF THE ZINC PLATED LAYER AND OXIDATION 表面不允許刮傷,抽孔/擠出成型部份也必須防止電鍍層有 氧化現象																																																															
F	5 THE MANUFACTURER SHALL NOTIFY ACBEL PRIOR TO CHANGES IN MANUFACTURING LOCATION 製造商如需變更製造地,需事先通知ACBEL																																																															
	6 THESE MATERIAL/PART/ASSEMBLY MUST BE COMPLIED TO ACBEL SPEC "CRITERIA FOR ENVIRONMENT- RELATED SUBSTANCES" 材質/零件/製程均必須符合康舒"環境管理物質規範"																																																															
G	7 ALL REF DIMENSIONS MUST BE COMPLIED TO MECHANICAL OUTLINE DRAWING REQUIREMENT 所有參考尺寸必須符合MO實際組裝要求																																																															
H	8 BARCODE LABEL, WARNING LABEL AND INFORMATION LABEL SHOULDE BE LOCATED ON NOTED SURFACE ,BEFORE ADHERING LABELS, SHEETMETAL SURFACE MUST BE FREE OF ANY GREASE, OIL AND DIRT 標籤黏貼的位置如圖示.在黏貼前,金屬表面必須沒有任何的 油污,油,或是塵土																																																															
	9 GROUND SYMBOL Ⓜ MUST BE LOCATED TO THE PERMANENTLY MARKED NEAR PRIMARY GROUND CONNECTION. 接地符號 Ⓜ 需永久的位於一次側接地處																																																															
J	10 MATERIAL THICKNESS: 0.7MM MATERIAL SUPPLIER PRIMARY SOURCE : CHINA STEEL ALTERNATE SOURCE : YIEH PHUI, BAO STEEL, WISCO 材料厚度: 0.7毫米 鋼板材料優先製造商: 第一優先: 中鋼 第二順位: 燐輝, 寶鋼, 武鋼																																																															
K	11 COVER , CHASSIS & SIDE PANEL MUST BE THE SAME COLOR UNLESS OTHERWISE SPECIFIED. 除非有特別指示,否則上蓋、下蓋、邊嵌板必須顏色一致																																																															
L	12 NET WEIGHT: 584 GRAMS ±3% 淨重 : 584 ±3%克																																																															
	13 RADUS SHOULD BE R0.5MM UNLESS OTHERWISE SPECIFIED. 未標示R角皆為0.5mm.																																																															
	14 SPOT WELDING & RIVETS MUST BE ABLE TO WITHSTAND A PULLING FORCE OF 20KGF MIN. 焊接或鉚接強度需大於20KGF的拉力																																																															
	15 UNIT : MM 單位 : 毫米																																																															
	16 NONE-SPECIFIED DIMENSIONS MUST BE COMPLIED TO 3D MODEL. 未標示尺寸必須符合3D模型要求.																																																															
	17 SCREW THREAD MUST BE WITHSTAND THE FOLLOWING TORQUE INDICATED : 螺紋鎖付扭轉抗力需大於下列數值: M3 * 0.5 12KGF-CM(MIN) M3.5 * 0.6 15KGF-CM(MIN) #6-32 12KGF-CM(MIN)																																																															
	18 STUD AND CLINCH NUT MUST BE FLUSH ON THE NOTED SURFACE WHICH MUST BE CONFORM TO THE FOLLOWING TORQUE INDICATED : 鉚接螺栓或螺帽,需符合下表扭力值:																																																															
	<table><tr><th rowspan="3">THREAD CODE 螺紋編號</th><th rowspan="3">SHEET THICKNESS 板厚(MM)</th><th colspan="2">SHEET MATERIAL 鋼板材質</th></tr><tr><th colspan="2">HOT-DIPPED SHEET 熱浸鋼板</th></tr><tr><th>PUSHOUT 推出抗力 (KGF MIN)</th><th>TORQUE OUT 扭轉抗力 (KGF-CM MIN)</th></tr><tr><td>M3 * 0.5</td><td rowspan="3">0.8 ~ 1.0</td><td>47</td><td>15</td></tr><tr><td>#6-32</td><td>50</td><td>18</td></tr><tr><td>M4 * 0.7</td><td>50</td><td>30</td></tr></table>															THREAD CODE 螺紋編號	SHEET THICKNESS 板厚(MM)	SHEET MATERIAL 鋼板材質		HOT-DIPPED SHEET 熱浸鋼板		PUSHOUT 推出抗力 (KGF MIN)	TORQUE OUT 扭轉抗力 (KGF-CM MIN)	M3 * 0.5	0.8 ~ 1.0	47	15	#6-32	50	18	M4 * 0.7	50	30																															
THREAD CODE 螺紋編號	SHEET THICKNESS 板厚(MM)	SHEET MATERIAL 鋼板材質																																																														
		HOT-DIPPED SHEET 熱浸鋼板																																																														
		PUSHOUT 推出抗力 (KGF MIN)	TORQUE OUT 扭轉抗力 (KGF-CM MIN)																																																													
M3 * 0.5	0.8 ~ 1.0	47	15																																																													
#6-32		50	18																																																													
M4 * 0.7		50	30																																																													
	19 METAL SURFACE AND INTERIOR SURFACE OF HOLES TO BE FREE OF OIL, NICKS/BURRS AND RESIDUE 金屬表面與孔內部的表面不可有油, 刮痕/毛邊與殘渣.																																																															
																																																																
	<table><tr><td>1</td><td colspan="2">PRIMARYLY</td><td>05/05/26</td><td>LISHIN</td></tr><tr><td>REV</td><td colspan="2">DESCRIPTION</td><td>DATE</td><td>BY</td></tr><tr><td colspan="5">REVISIONS</td></tr><tr><td colspan="2" rowspan="2"> 康舒科技 ACBEL POLYTECH INC.</td><td colspan="2">DRAWINGS & SPEC. ARE THE EXCLUSIVE PROPERTY OF ACBEL POLYTECH INC. SAID ITEMS ARE ISSUED IN STRICT CONFIDENTIAL</td></tr><tr><td colspan="2">TOLERANCES UNLESS OTHERWISE NOTED 0~8: ±0.1, 8~120: ±0.2, 120~315: ±0.3, 315~>80.5: ±0.5, ANGLES: ±0.2°</td></tr><tr><td colspan="2" rowspan="2"> THIRD ANGLE PROJECTION</td><td colspan="2">MODEL NO : FSN011-4QLG</td></tr><tr><td colspan="2">PART NO. : MO-FSN011-4QLG</td></tr><tr><td colspan="2" rowspan="2"> Metric A1</td><td colspan="2">DWG NO. : MO-FSN011-4QLG_1</td></tr><tr><td colspan="2">TITLE : MECHANICAL OUTLINE</td></tr><tr><td colspan="2" rowspan="2">SCALE : 1:1 SHEET 1 OF 4</td><td>DESIGNER</td><td>Lishin</td><td>05/05/26</td></tr><tr><td>CHECKED</td><td>Joe</td><td>05/05/26</td></tr><tr><td colspan="2" rowspan="2"></td><td>APPROVED</td><td>Joe</td><td>05/05/26</td></tr><tr><td colspan="2"></td></tr></table>															1	PRIMARYLY		05/05/26	LISHIN	REV	DESCRIPTION		DATE	BY	REVISIONS					 康舒科技 ACBEL POLYTECH INC.		DRAWINGS & SPEC. ARE THE EXCLUSIVE PROPERTY OF ACBEL POLYTECH INC. SAID ITEMS ARE ISSUED IN STRICT CONFIDENTIAL		TOLERANCES UNLESS OTHERWISE NOTED 0~8: ±0.1, 8~120: ±0.2, 120~315: ±0.3, 315~>80.5: ±0.5, ANGLES: ±0.2°		 THIRD ANGLE PROJECTION		MODEL NO : FSN011-4QLG		PART NO. : MO-FSN011-4QLG		 Metric A1		DWG NO. : MO-FSN011-4QLG_1		TITLE : MECHANICAL OUTLINE		SCALE : 1:1 SHEET 1 OF 4		DESIGNER	Lishin	05/05/26	CHECKED	Joe	05/05/26			APPROVED	Joe	05/05/26			
1	PRIMARYLY		05/05/26	LISHIN																																																												
REV	DESCRIPTION		DATE	BY																																																												
REVISIONS																																																																
 康舒科技 ACBEL POLYTECH INC.		DRAWINGS & SPEC. ARE THE EXCLUSIVE PROPERTY OF ACBEL POLYTECH INC. SAID ITEMS ARE ISSUED IN STRICT CONFIDENTIAL																																																														
		TOLERANCES UNLESS OTHERWISE NOTED 0~8: ±0.1, 8~120: ±0.2, 120~315: ±0.3, 315~>80.5: ±0.5, ANGLES: ±0.2°																																																														
 THIRD ANGLE PROJECTION		MODEL NO : FSN011-4QLG																																																														
		PART NO. : MO-FSN011-4QLG																																																														
 Metric A1		DWG NO. : MO-FSN011-4QLG_1																																																														
		TITLE : MECHANICAL OUTLINE																																																														
SCALE : 1:1 SHEET 1 OF 4		DESIGNER	Lishin	05/05/26																																																												
		CHECKED	Joe	05/05/26																																																												
		APPROVED	Joe	05/05/26																																																												
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16																																																


RELEASE			
正式發行圖面		REV: 1	
ENG.	Lishin	APPR.	Joe

CASE DIMENSION

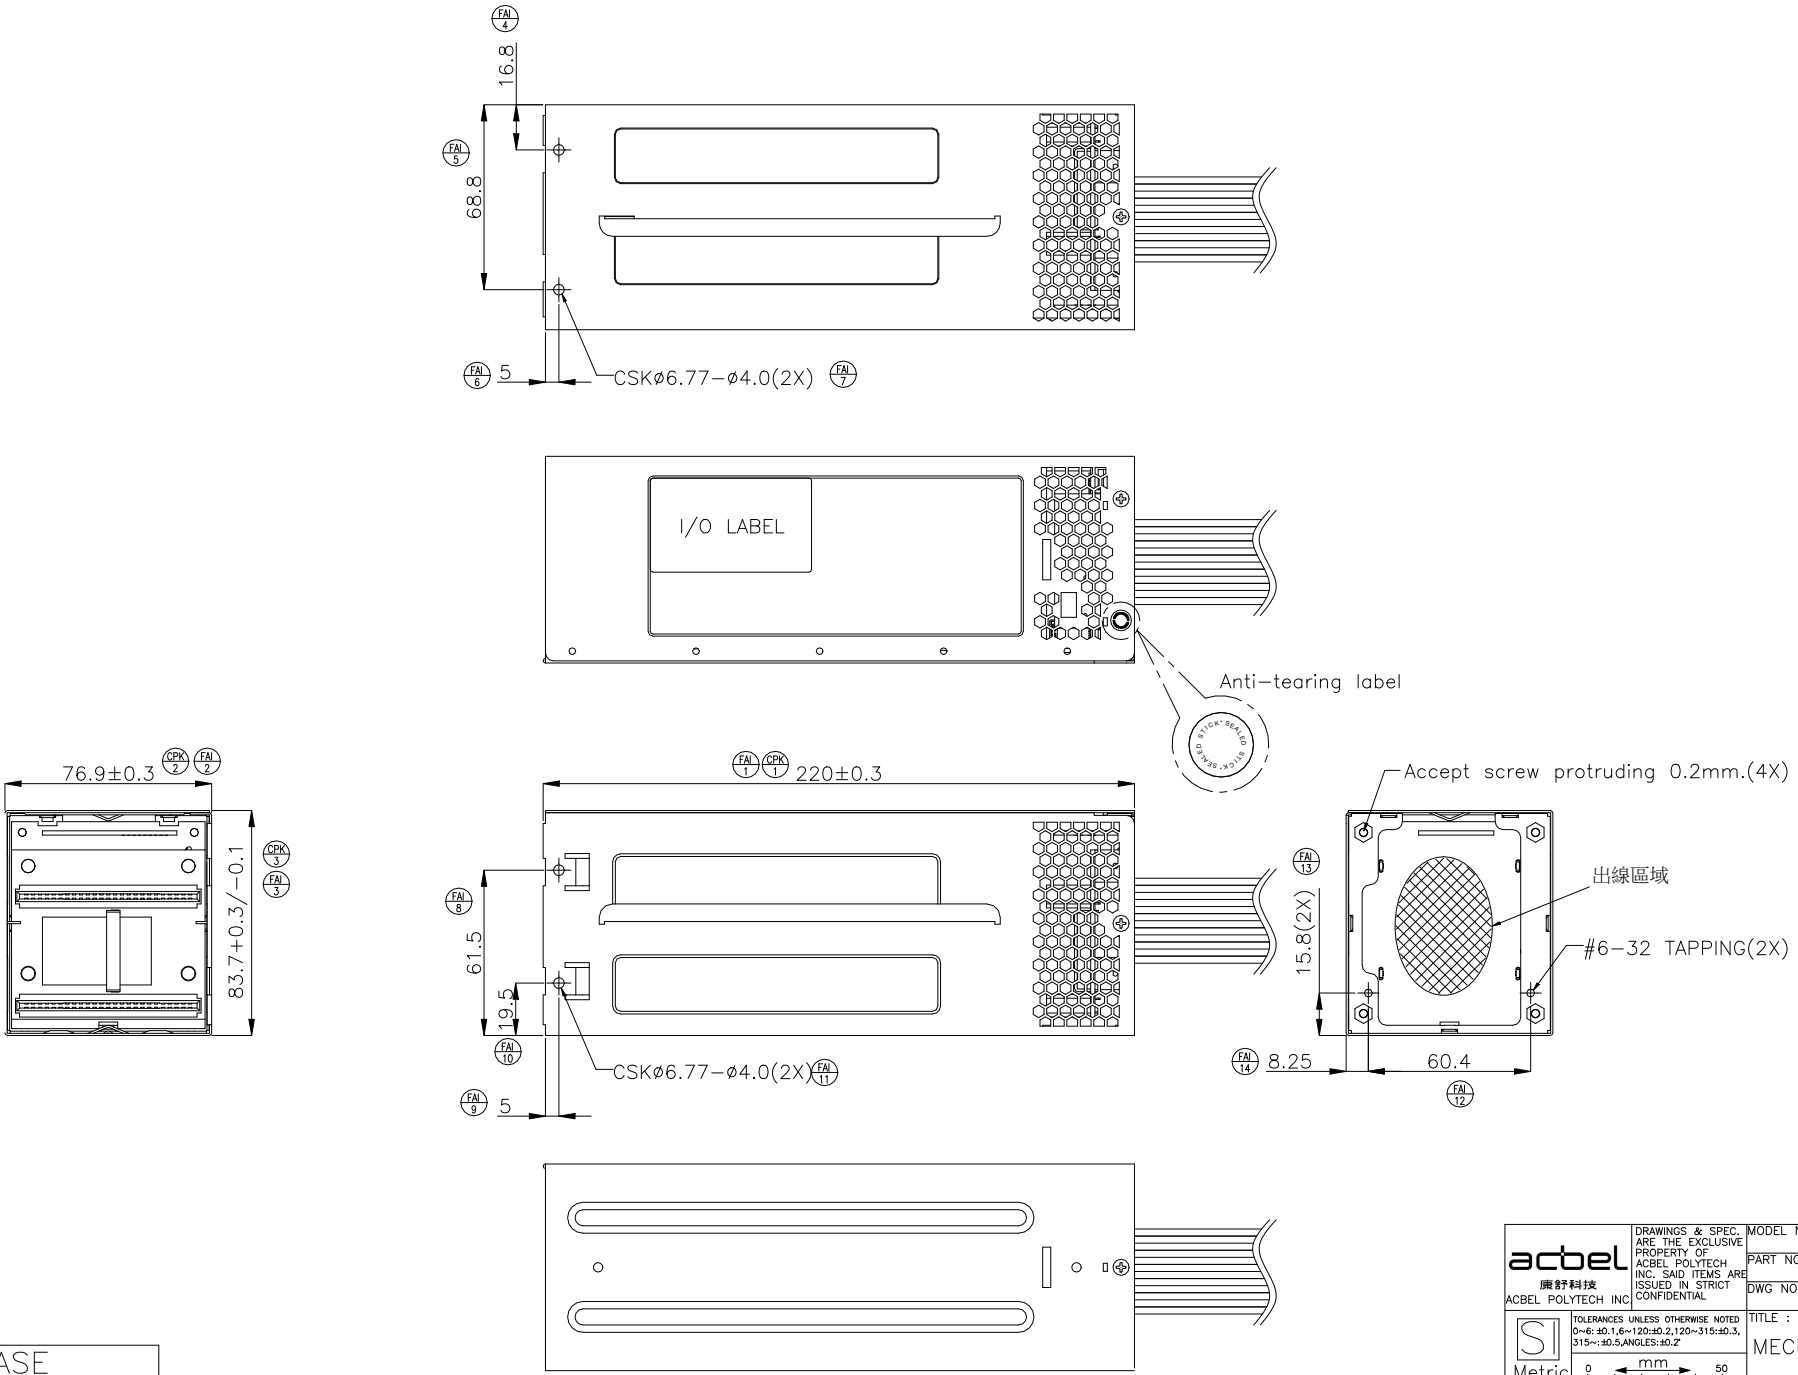


RELEASE			
正式發行圖面		REV: 1	
ENG.	Lishin	APPR.	Joe


acbel 康舒科技 ACBEL POLYTECH INC	DRAWINGS & SPEC. ARE THE EXCLUSIVE PROPERTY OF ACBEL POLYTECH INC. SAID ITEMS ARE ISSUED IN STRICT CONFIDENTIAL	MODEL NO : FSN011-4QLG		
		PART NO. : MO-FSN011-4QLG		
SI Metric A1	TOLERANCES UNLESS OTHERWISE NOTED 0~6:±0.1, 6~120:±0.2, 120~315:±0.3, 315~:±0.5, ANGLES:±0.2°	DWG NO. : MO-FSN011-4QLG_1		
		TITLE : MECHANICAL OUTLINE		
		0 mm 50 THIRD ANGLE PROJECTION		
		DESIGNER	Lishin	05/05/26
CHECKED	Joe	05/05/26		
APPROVED	Joe	05/05/26		
SCALE : 1:1 SHEET 2 OF 4				

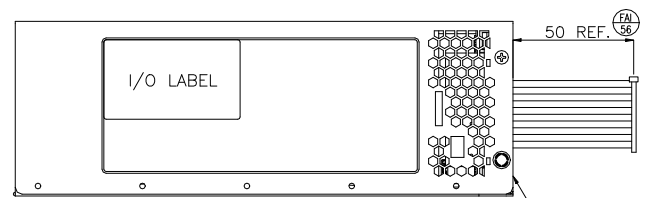

CASE EDGE

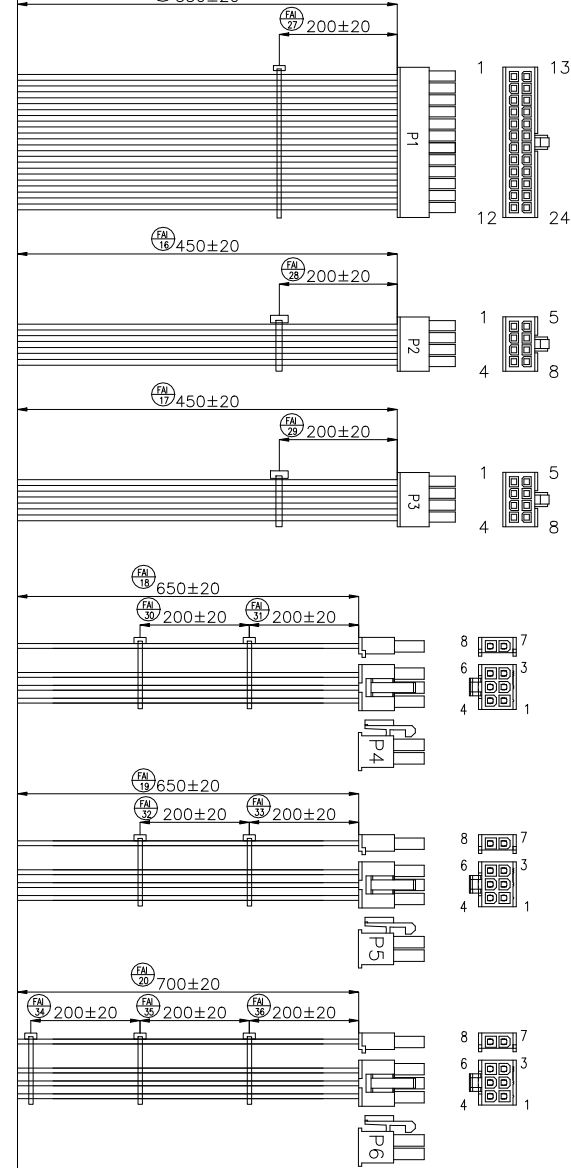

CONN.	PIN	OUTPUT	COLOR	AWG
P1 MINI-FIT 24PIN	1	+3.3V	ORANGE	18
	2	+3.3V	ORANGE	18
	3	GND	BLACK	18
	4	+5V	RED	18
	5	GND	BLACK	18
	6	+5V	RED	18
	7	GND	BLACK	18
	8	PG	GRAY	22
	9	+5VSB	PURPLE	18
	10	+12V	YELLOW	18
	11	+12V	YELLOW	18
	12	+3.3V	ORANGE	18
	13	+3.3V	ORANGE	18
	14			
	15	GND	BLACK	18
	16	PS-ON	GREEN	22
	17	GND	BLACK	18
	18	GND	BLACK	18
	19	GND	BLACK	18
	20			
	21	+5V	RED	18
	22	+5V	RED	18
	23	+5V	RED	18
	24	GND	BLACK	18
P2-P3 MINI-FIT 8PIN	1	GND	BLACK	18
	2	GND	BLACK	18
	3	GND	BLACK	18
	4	GND	BLACK	18
	5	+12V	YELLOW	18
	6	+12V	YELLOW	18
	7	+12V	YELLOW	18
	8	+12V	YELLOW	18
P4-P6 PCI-E 6+2 8PIN	1	+12V	YELLOW	18
	2	+12V	YELLOW	18
	3	+12V	YELLOW	18
	4	GND	BLACK	18
	5	GND	BLACK	18
	6	GND	BLACK	18
	7	GND	BLACK	18
	8	GND	BLACK	18

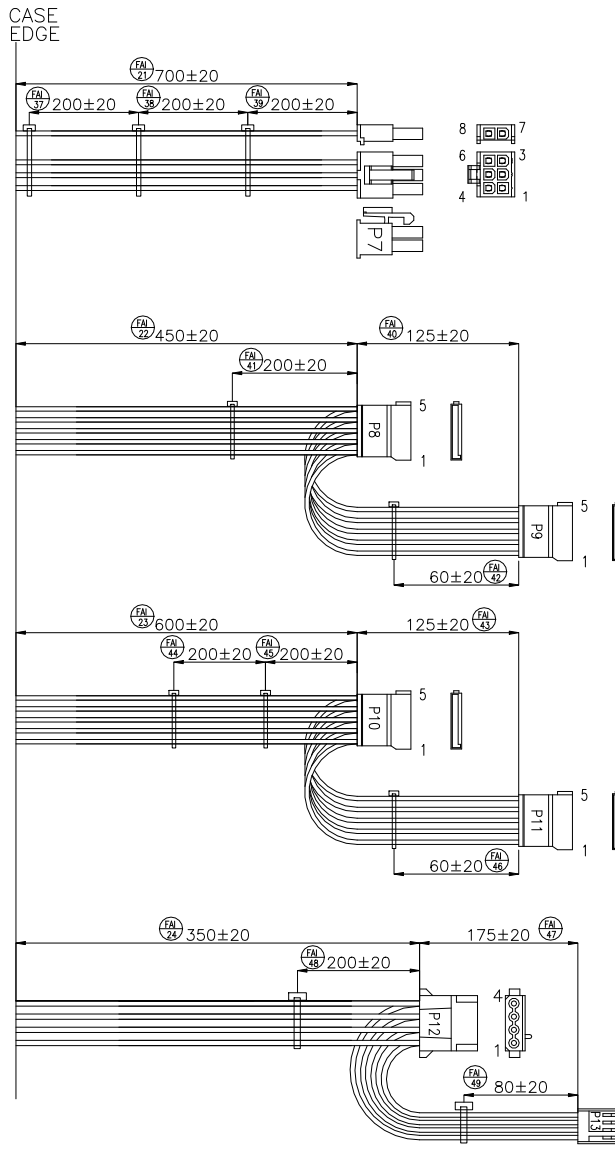

CONN.	PIN	OUTPUT	COLOR	AWG
P7 PCI-E 6+2 8PIN	1	+12V	YELLOW	18
	2	+12V	YELLOW	18
	3	+12V	YELLOW	18
	4	GND	BLACK	18
	5	GND	BLACK	18
	6	GND	BLACK	18
	7	GND	BLACK	18
	8	GND	BLACK	18
CONN.	PIN	OUTPUT	COLOR	AWG
P8-P11 SATA	1	+3.3V	ORANGE	18
	2	GND	BLACK	18
	3	+5V	RED	18
	4	GND	BLACK	18
	5	+12V	YELLOW	18
CONN.	PIN	OUTPUT	COLOR	AWG
P12 HDD	1	+12V	YELLOW	18
	2	GND	BLACK	18
	3	GND	BLACK	18
	4	+5V	RED	18
CONN.	PIN	OUTPUT	COLOR	AWG
P13 FDD	1	+5V	RED	22
	2	GND	BLACK	22
	3	GND	BLACK	22
	4	+12V	YELLOW	22

actbel

康舒科技

ACBEL POLYTECH INC.

SI

Metric

A1

0 1 2 3 4 5

mm

THIRD ANGLE PROJECTION

SCALE : 1:1

SHEET 3 OF 4

DRAWINGS & SPEC. ARE THE EXCLUSIVE PROPERTY OF ACBEL POLYTECH INC. SAID ITEMS ARE ISSUED IN STRICT CONFIDENTIAL

TOLERANCES UNLESS OTHERWISE NOTED
0~6:±0.1, 6~120:±0.2, 120~315:±0.3, 315~∞:±0.5, ANGLES:±0.2°

MODEL NO : FSN011-4QLG

PART NO. : MO-FSN011-4QLG

DWG NO. : MO-FSN011-4QLG_1

TITLE : MECHANICAL OUTLINE

DESIGNER Lishin 05/05/26

CHECKED Joe 05/05/26


APPROVED Joe 05/05/26

RELEASE			
正式發行圖面		REV: 1	
ENG.	Lishin	APPR.	Joe

CONN.	PIN	OUTPUT	COLOR	AWG
P14-P15 HDD	1	+12V	YELLOW	18
	2	GND	BLACK	18
	3	GND	BLACK	18
	4	+5V	RED	18
PMBUS	1	I2CSCL	WHT/GRN	24
	2	I2CSDA	WHT/YEL	24
	3	PS_Alert	WHITE	24
	4	GND	BLACK	24
	5			
P16 MINI-FIT (4+4)8PIN	1	GND	BLACK	18
	2	GND	BLACK	18
	3	GND	BLACK	18
	4	GND	BLACK	18
	5	+12V	YELLOW	18
	6	+12V	YELLOW	18
	7	+12V	YELLOW	18
	8	+12V	YELLOW	18

CONN.	PIN	OUTPUT	COLOR	AWG
P17 12V-2×6 12+4PIN H++	1	+12V	YELLOW	16
	2	+12V	YELLOW	16
	3	+12V	YELLOW	16
	4	+12V	YELLOW	16
	5	+12V	YELLOW	16
	6	+12V	YELLOW	16
	7	GND	BLACK	16
	8	GND	BLACK	16
	9	GND	BLACK	16
	10	GND	BLACK	16
	11	GND	BLACK	16
	12	GND	BLACK	16
	S1			
	S2			
	S3	GND	BLACK	28
	S4	GND	BLACK	28

CONN.	PIN	OUTPUT	COLOR	AWG
P18-P19 PCIE 6+2 8PIN	1	+12V	YELLOW	18
	2	+12V	YELLOW	18
	3	+12V	YELLOW	18
	4	GND	BLACK	18
	5	GND	BLACK	18
	6	GND	BLACK	18
	7	GND	BLACK	18
	8	GND	BLACK	18

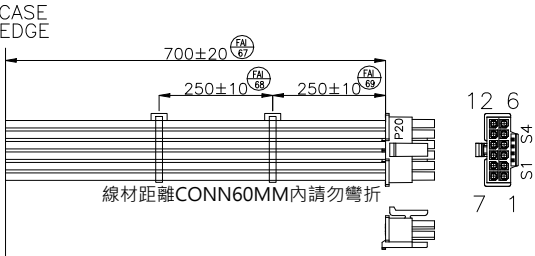

CONN.	PIN	OUTPUT	COLOR	AWG
P20 12V-2×6 12+4PIN H++	1	+12V	YELLOW	16
	2	+12V	YELLOW	16
	3	+12V	YELLOW	16
	4	+12V	YELLOW	16
	5	+12V	YELLOW	16
	6	+12V	YELLOW	16
	7	GND	BLACK	16
	8	GND	BLACK	16
	9	GND	BLACK	16
	10	GND	BLACK	16
	11	GND	BLACK	16
	12	GND	BLACK	16
	S1			
	S2			
	S3	GND	BLACK	28
	S4	GND	BLACK	28

actbel

廣舒科技

ACBEL POLYTECH INC.

SI

Metric

A1

0

mm

50

THIRD ANGLE PROJECTION

SCALE : 1:1

SHEET 4 OF 4

DRAWINGS & SPEC. ARE THE EXCLUSIVE PROPERTY OF ACBEL POLYTECH INC. SAID ITEMS ARE ISSUED IN STRICT CONFIDENTIAL

TOLERANCES UNLESS OTHERWISE NOTED
0~6:±0.1, 6~120:±0.2, 120~315:±0.3, 315~∞:±0.5, ANGLES:±0.2°

MODEL NO. : FSN011-4QLG

PART NO. : MO-FSN011-4QLG

DWG NO. : MO-FSN011-4QLG_1

TITLE : MECHANICAL OUTLINE

DESIGNER	Lishin	05/05/26
CHECKED	Joe	05/05/26
APPROVED	Joe	05/05/26


RELEASE			
正式發行圖面		REV: 1	
ENG.	Lishin	APPR.	Joe



康舒科技


ACBEL POLYTECH INC.

I/O Label Drawing


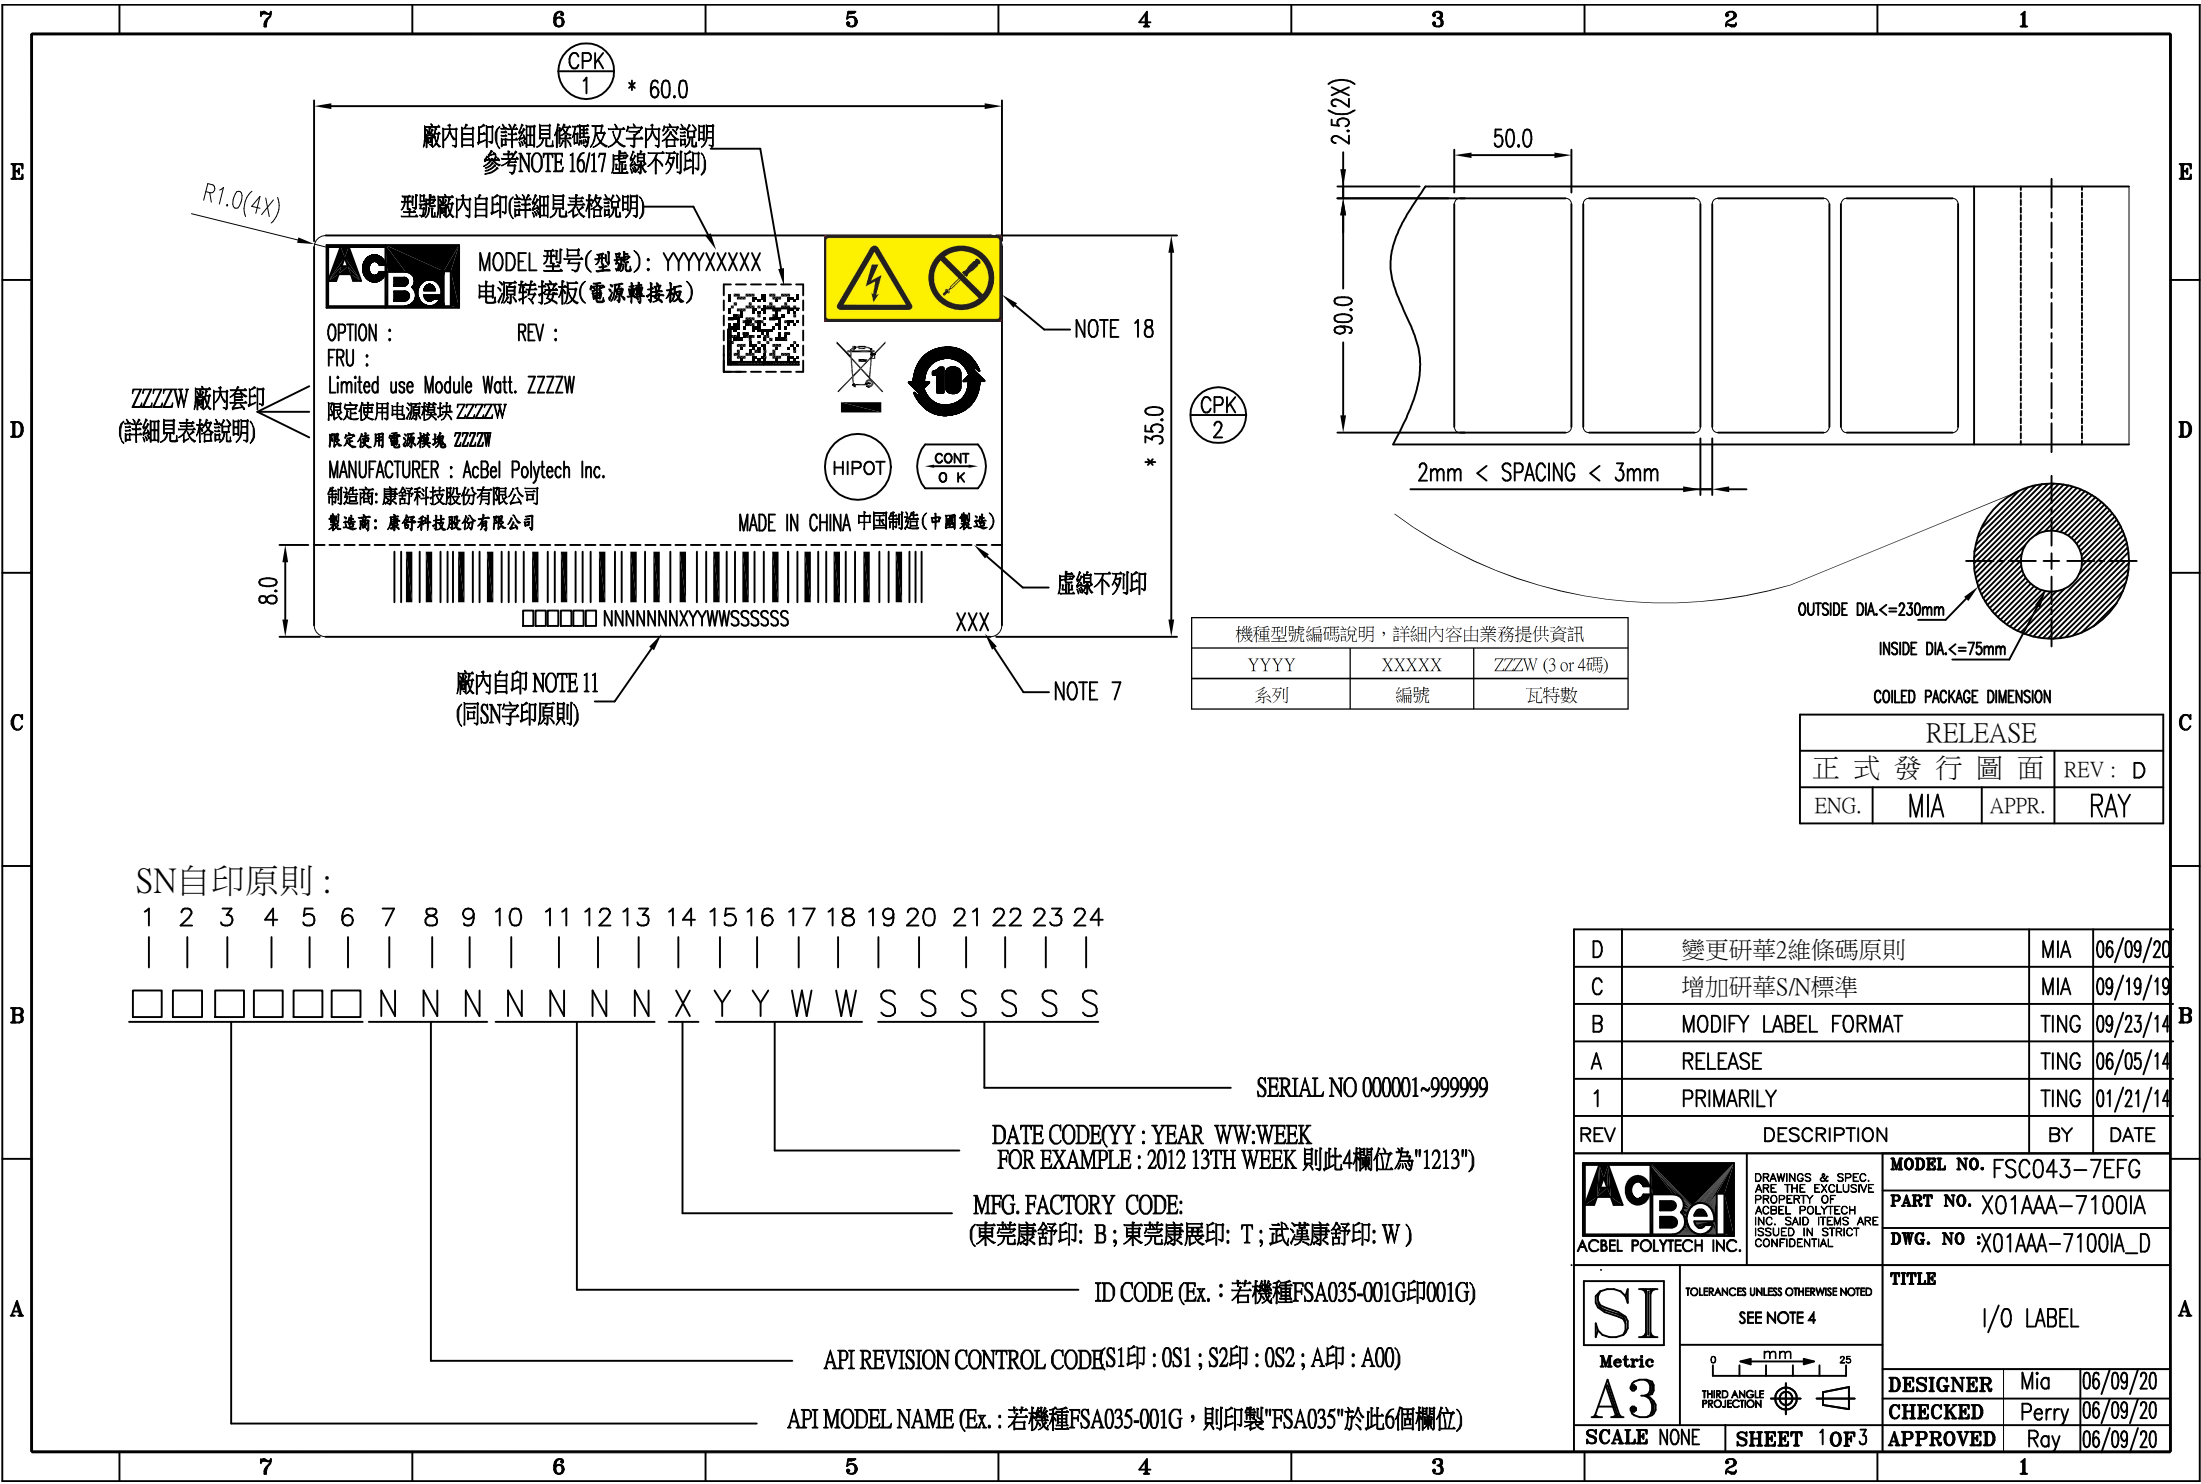


D	變更研華2維條碼原則	MIA	06/09/20
C	增加研華S/N標準	MIA	09/19/19
B	MODIFY LABEL FORMAT	TING	09/23/14
A	RELEASE	TING	06/05/14
1	PRIMARILY	TING	01/21/14
REV	DESCRIPTION	BY	DATE
AcBel ACBEL POLYTECH INC.		DRAWINGS & SPEC. ARE THE EXCLUSIVE PROPERTY OF ACBEL POLYTECH INC. SAID ITEMS ARE ISSUED IN STRICT CONFIDENTIAL	
		MODEL NO. FSC043-7EFG	
		PART NO. X01AAA-7100IA	
		DWG. NO :X01AAA-7100IA_D	
SI MetricA3		TOLERANCES UNLESS OTHERWISE NOTED SEE NOTE 4	
SCALE NONE		SHEET 1 OF 3	
		TITLE I/O LABEL	
		DESIGNER	Mia 06/09/20
		CHECKED	Perry 06/09/20
		APPROVED	Ray 06/09/20

	7	6	5	4	3	2	1		
E	NOTES: 1. UNIT : MM. 單位 : 毫米. 2. MATERIAL : 2.1 FACE STOCK 底材: WHITE POLYESTER,THICKNESS = 0.05 MM. 白霧龍50#,厚度= 0.05毫米 2.2 OVERLAMINATION 保護膜 ☐ A TRANSPARENT FILM 透明膠膜 ☒ NONE 無 2.3 ADHESIVE 背膠: PRESSURE SENSITIVE ACRYLIC 壓克力壓膜膠 THICKNESS 厚度= 0.025 MM 2.4 BACKED WITH RELEASE LINER. 背面附離型紙 2.5 LABEL TO BE AFFIXED TO AND MAXIMUM TEMPERATURE RATING 貼紙所貼附之材質與最大耐溫等級 ☒ GALVANIZED STEEL 鍍鋅鋼 ☐ ALUMINUM 鋁 ☐ NICKEL PLATED METAL 鍍鎳金屬 ☐ ZINC PLATED METAL WITH CHROMATE POST TREATMENT 後處理之鍍鉻酸鋅金屬 ☒ 100°C 攝氏100度 2.6 MATERIAL MUST BE UL RECOGNIZED AND COMPLY TO UL 969 STANDARD. 材質必須符合UL認證,並且遵從UL 969標準. 3. LABEL MUST BE MADE BY A UL RECOGNIZED AND CSA APPROVED VENDOR. 貼紙之製造商必須是UL與CSA所認證. 4. TOLERANCE : XX = +/- 0.5 XX.X = +/- 0.2 XX.XX = +/- 0.15 公差 : XX = +/- 0.5 XX.X = +/- 0.2 XX.XX = +/- 0.15 5. "*"CRITICAL DIMENSION SYMBOL,SUPPLIER MUST INSPECT THIS DIMENSION FOR EVERY SHIPMENT "*"表示該(尺寸/位置)為設計之重點尺寸,供應商每次出貨前 必須檢驗合格後,方可出貨. 6. ALL PRODUCTS MUST BE THE SAME AS ENGINEERING API MECHANICAL ENGINEERING APPROVED SAMPLES,ANY MODIFICATION MUST BE APPROVED BY ACBEL MECHANICAL ENGINEERING SECTION. 所有產品必須與認可的樣品一致,任何的修改都必須經由 康舒機構工程師同意及認可. 7. LABEL MUST CONTAIN THE VENDOR'S ID MARK LOCATED IN THE AREA INDICATED. ID MARK LETTER HEIGHT TO BE 1.5MM. 貼紙必須印製廠商代碼,代碼字高為1.5毫米. 8. CHARACTER HEIGHT : 1.5 MM ,UNLESS OTHERWISE SPECIFIED. 圖面未標示之字體高度皆為 1.5 毫米 9. PRINTED COLOR : BLACK - TEXT, GRAPHICS, IMAGE, LOGO SURROUND SHAPE. WHITE - BACKGROUND. 列印顏色 : 黑色 - 文字、圖形、圖像、標誌、外圍圖形 白色 - 背景		10. THESE MATERIAL/PART/ASSEMBLY MUST COMPLY TO ACBEL SPEC"CRITERIA FOR ENVIRONMENT-RELATED SUBSTANCES". 材質/零件/製程均必須符合康舒"環境管理物質規範". 11. BAR CODE FORMAT: CODE 128 / CPI : 13.64 THE NARROW ELEMENT DIMENSION (X DIMENSION) SHOULD BE WITHIN A RANGE OF 0.170MM(0.0067 INCH) 條碼格式 : CODE 128 / CPI 寬窄比 : 0.17毫米(0.0067英吋) 12. BAR CODE & SN & FRU 廠內自印 13. REV : XXX (S1印 : 0S1 ; S2印 : 0S2 ; A印 : A00) 14. DATE : XYYWW 為廠內自印,4碼 YYWW為製造週期,X為工廠代碼* 工廠代碼 : 康舒東莞廠印B,康展東莞廠印T,康舒武漢廠印W 15. FRU自印原則 AXXSS□□□□ FW REVISION (印 : A0000 ; A0001 ; A0002 ...Z9999) MINOR REVISION (印 : 1 ; 2 ; 3 ...) MAJOR REVISION (印 : 1 ; 2 ; 3 ...) TYP (PMBUS印 : PM ; SMBUS印 : SM ; EEPROM印 : EP) API 16. 2維條碼自印原則 康舒標準2維條碼自印原則 XXXXXXXXXXXX;000000NNNNNNNNXYWWSSSSSS;YYMMDD;XXXXXXXXXX FRU (參照FRU自印原則) 生產日期 (例 : 2011年2月14日生產則印"110214") SN (參照康舒標準SN自印原則) OPTION MODEL 研華標準2維條碼自印原則 XXXXXXXXXXXX;000000NNNNNNNNXYWWSSSSSS;YYMMDD;XXXXXXXXXX;PPRRYYWWSSSSSS SN (參照研華標準SN自印原則) FRU (參照FRU自印原則) 生產日期 (例 : 2011年2月14日生產則印"110214") SN (參照康舒標準SN自印原則) OPTION MODEL <td colspan="2"> 19. 加入工廠代碼,如康舒東莞廠生產即印製(B)如圖示,如 康展東莞廠生產即印製(T); 如康舒武漢廠生產即印製(W) 20. USES OF RED PHOSPHORUS MATERIAL IS PROHIBITED. 禁止使用含有紅磷材料 </td>		19. 加入工廠代碼,如康舒東莞廠生產即印製(B)如圖示,如 康展東莞廠生產即印製(T); 如康舒武漢廠生產即印製(W) 20. USES OF RED PHOSPHORUS MATERIAL IS PROHIBITED. 禁止使用含有紅磷材料				
D									
C									
B									
A									
	7	6	5	4	3	2	1		
			17. 條碼及文字內容說明 編碼: DATAMATRIX 18. 警告符號顏色定義如下 : PMC Black黑色 - 文字 . 圖形 . 圖象 . 標誌 PMC 108C黃色 - 背景 0.5 TYP. RELEASE 正式發行圖面 ENG. MIA APPR. RAY REV: D						
						AcBel ACBEL POLYTECH INC. SI MetricA3 SCALE NONE	DRAWINGS & SPEC. ARE THE EXCLUSIVE PROPERTY OF ACBEL POLYTECH INC. SAID ITEMS ARE ISSUED IN STRICT CONFIDENTIAL TOLERANCES UNLESS OTHERWISE NOTED SEE NOTE 4 THIRD ANGLE PROJECTION SHEET 3 OF 3	MODEL NO. FSC043-7EFG PART NO. X01AAA-7100IA DWG. NO :X01AAA-7100IA_D TITLE I/O LABEL DESIGNER Mia 06/09/20 CHECKED Perry 06/09/20 APPROVED Ray 06/09/20	A



RELEASE			
正式發行圖面		REV : D	
ENG.	MIA	APPR.	RAY

 ACBEL POLYTECH INC.		DRAWINGS & SPEC. ARE THE EXCLUSIVE PROPERTY OF ACBEL POLYTECH INC. SAID ITEMS ARE ISSUED IN STRICT CONFIDENTIAL		MODEL NO. FSC043-7EFG	
 Metric A3		TOLERANCES UNLESS OTHERWISE NOTED SEE NOTE 4 		PART NO. X01AAA-7100IA	
				DWG. NO :X01AAA-7100IA_D	
				TITLE I/O LABEL	
				DESIGNER Mia 06/09/20	
				CHECKED Perry 06/09/20	
				APPROVED Ray 06/09/20	
SCALE NONE		SHEET 3 OF 3			



MODEL 型号(型號): R2CU4202A
电源转接板(電源轉接板)

OPTION : P4QL

REV : A00

FRU : PM12V0005

Limited use Module Watt. 2000W

限定使用电源模块 2000W

限定使用電源模块 2000W

MANUFACTURER : AcBel Polytech Inc.

制造商: 康舒科技股份有限公司

製造商: 康舒科技股份有限公司




MADE IN CHINA 中国制造(中國製造)



(SN)

TR



MODEL 型号(型號): R2CU4202A
电源转接板(電源轉接板)

OPTION : P4QL

REV : A00

FRU : APM12V0005

Limited use Module Watt. 2000W


限定使用电源模块 2000W

限定使用電源模块 2000W

MANUFACTURER : AcBel Polytech Inc.

制造商: 康舒科技股份有限公司

製造商: 康舒科技股份有限公司



MADE IN CHINA 中国制造(中國製造)



FSN011A004QLGB2633R00001

TR