

## RSC-2KH



### Features :

- Up to 10 x 3.5" external hot-swap HDD trays
- Front access USB port
- 3 x easy-swap middle fans for superior cooling
- Supports single or redundant power supply
- Rear access power supply alarm reset button


### SPECIFICATIONS

Dimensions (W x D x H) (with chassis ears)	mm : 482.6 x 700 x 88.8		
	inches : 19 x 27.5 x 3.5		
Industry Standard	EIA-RS310D		
Materials	Heavy-duty preplated SPGC cold-rolled steel		
Color	Front Panel : Black		
Cooling	Middle : 3 x 80x38mm easy-swap fans		
Power Supply	800W single PSU 80+		
	800W 1+1 hot-swap redundant 80+ (Silver)		
Expansion	3 x PCI slots via riser card(full height, full length) or 7 x low profile PCI slots		
Buttons	Power on/off, system reset and 1 x USB port		
Indicators	Power, LAN and HDD LEDs		
System Board	12"(W) x 13"(D) E-ATX/SSI EEB 3.6 compliant MB		
Drive Bay	External	3.5" hot-swap	8 (+2 optional)
	Internal	2.5" HDD	2
	Peripheral Drives	Slim CD-ROM/ DVD-ROM	1

Temperature	0°C(32°F) ~ 50°C(122°F)	
Humidity	5%~95% non-condensing	
Gross Weight	(w/ PSU & Rail)	26.9 kgs / 59.2 lbs
Packaging Dimension	(W x D x H)	mm : 614 x 945 x 298
Cubic Feet	6.1	
Reference Container Loading	20'	155
	40'	320
	40' H	385
Backplane	4 x 3.5" G/H-Tray SATA 6G B/P with 4 x SATA	
	4 x 3.5" G/H-Tray SAS 6G B/P SGPIO with mini SAS	

• TOP VIEW •

2 x 2.5" internal HDD trays  
(mounted adjacent to PSU)

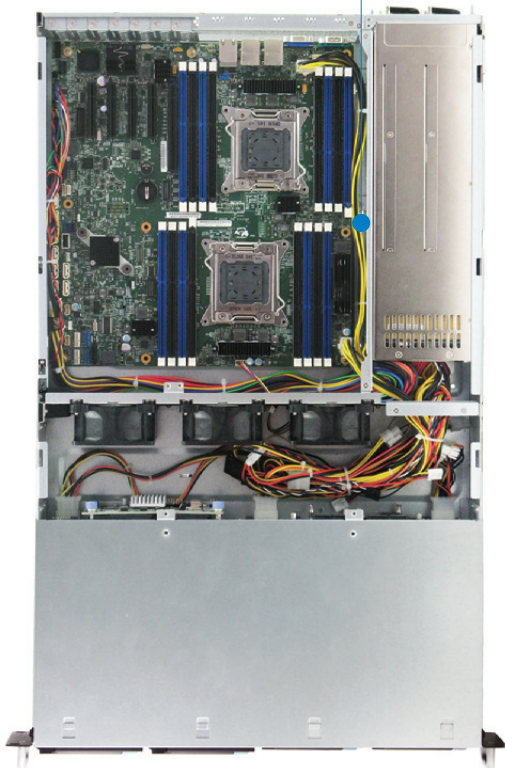

• REAR VIEW •

3 x PCI slots via riser card or  
7 x low profile PCI slots



• FRONT VIEW •


Power on/off, system reset and LEDs for Power, HDD & LAN



(8-bay)



(10-bay)



Optional - Front bezel with  
key lock for security and protection

• MECHANICAL  
DRAWING •

