



Issued Date : Aug.01, 2014

---

## SPECIFICATION

**Model Name : PIST1070-EP SH-80**

**Description : CRS Range High Efficiency 700Wx2 Mini Redundant Power Supply**

**High  
Efficiency**

**Low Noise**

**Revision : VA7**

## Contents

- 1. General Description**
- 2. Input Characteristics**
  - 2.1. AC Input voltage and frequency
  - 2.2. Input current and inrush current
  - 2.3. Power Factor
- 3. Power Efficiency**
- 4. Output Characteristics**
  - 4.1. Output Voltage & Current Regulation
  - 4.2. DC Output Ripple & Noise
  - 4.3. Hold Up Time
  - 4.4. Rise Time
  - 4.5. Dynamic load response time
  - 4.6. Remote on/off control
- 5. Power good signal**
- 6. PROTECTION**
  - 6.1. Over voltage protection
  - 6.2. Under-voltage protection
  - 6.3. Over current Protection
  - 6.4. Short circuit protection
  - 6.5. Thermal Protection
- 7. Power System Signal status**
  - 7.1. Buzzer status
  - 7.2. LED indicators
  - 7.3. TTL signal
- 8. Load sharing**
- 9. Isolation**
  - 9.1. Insulation Resistance
  - 9.2. Dielectric Withstand Voltage
  - 9.3. Leakage current



## **10. Safety Requirements**

### **11. EMC**

11.1. EMI

11.2. EMS

### **12. Environmental**

12.1. Temperature

12.2. Humidity

12.3. Altitude

12.4. Cooling Method

### **13. Reliability**

13.1 MTBF Qualification

## **14. Mechanical 2D Drawing and Power Connector**

14.1. Outside Dimension

14.2. DC Output cables



## 1. General Description

This specification describes the performance characteristics of a 700 watts hot swappable, 1+1 power system with +3.3V,+5V,+12V, -12V main DC outputs, and 5V standby outputs. The system is configured to hold two identical 700W power supply modules, **CRS Model PIST1070-EPSH-80**.

## 2. Input Characteristics

### 2.1. AC Input voltage and frequency

Minimum	Nominal	Maximum	Unit
90	100~240	264	VAC
47	50~60	63	Hz

### 2.2. Input current and inrush current

AC Input Voltage	MAX. Input Current per power supply module	Inrush Current per power supply module
115Vac	12A	30A
230Vac	6A	60A

### 2.3. Power Factor

90Vac	115Vac	230Vac	264Vac
> 0.99	> 0.98	> 0.95	> 0.92

## 3. Power Efficiency

The Minimum efficiency of the power supply is 80% at full load and 115Vac/60HZ input.



## 4. Output Characteristics

### 4.1. Output Voltage & Current Regulation

Output Voltage	Min. Current	Rated current	REGULATION
+3.3V	1A	32A	±5%
+5V	1A	32A	±5%
+12V	1A	57A	±5%
-12V	0A	0.8A	±5%
+5VSB	0.5A	3.5A	±5%

Note: The combined total power from 5V & 3.3V shall not exceed 190W.

### 4.2. DC Output Ripple & Noise

Output Voltage	Ripple & Noise (Max.)
+3.3V	60mVp-p
+5V	60mVp-p
+12V	120mVp-p
-12V	120mVp-p
+5VSB	50mVp-p

**Note:**

Ripple & Noise bandwidth is set to 20MHz.

Use a 0.1uF ceramic capacitor in parallel with a 10uF electrolytic capacitor at output connector terminals for ripple & noise measurements.

### 4.3. Hold Up Time

Output Voltage	115VAC Input	230VAC Input
+3.3V	> 16ms	> 16ms
+5V	> 16ms	> 16ms
+12V	> 16ms	> 16ms
-12V	> 16ms	> 16ms
+5VSB	> 16ms	> 16ms

Note: All of dc output at full load.

#### 4.4. Rise Time

Output Voltage	115/230Vac Input & Full Load
+3.3V	20ms (max.)
+5V	20ms (max.)
+12V	20ms (max.)
-12V	20ms (max.)
+5VSB	20ms (max.)

Note: The rise time measured is when the output voltages rise from 10% to 90% of specified output voltage  $V_{out}$  observed on the channel waveform.

#### 4.5. Dynamic load response time

The following shall apply to the 3.3 V, 5 V, and 12 V outputs:

Output voltage for each output shall recover to within 5 % of its steady state level in less than 1 ms under the following conditions:

AC Input Voltage: 90VAC ~ 264VAC			
Repetition rate of 100Hz with 50 % duty cycle			
Output	Step Load Size	Load Slew Rate	Capacitive Load
+3.3V	30% to 100% to 30% load	0.5 A/u sec	6000uF
+5V	30% to 100% to 30% load	0.5 A/u sec	6000uF
+12V	60% to 100% to 60% load	1 A/u sec	6000uf
+5SB	0% to 100% to 0% load	0.5 A/u sec	350uF

#### 4.6. Remote on/off control

The main outputs of this power supply (3.3V,5V,12V,-12V) shall be energized when input signal \*PSON is active. \*PSON is an active low TTL compatible signal referenced to the +5V standby common. This input signal shall be an open collector signal capable of sinking a minimum of 1.6mA. When \*PSON becomes inactive, the main outputs shall be disabled.

	PSU on	PSU off
PSON Signal	LOW (0.8V max.)	HI (2V min.)

## 5. Power good signal

The system shall have an active high TTL compatible signal capable of sinking 1mA and sourcing 100uA. The signal shall become active within 100 to 500 ms from the instant +5V output reaches a steady state level within the specified regulation limits. It shall become inactive at least 1 ms before +5V drops to below the lower regulation limit.

Power good @ 115/230VAC , Full Load	200ms ~ 500ms
Power Fail @ 115/230VAC , Full Load	1ms (Min.)

## 6. Protection

### 6.1. Over voltage protection

Output	Min	Max	Comments
+3.3V	3.75V	4.3V	PSU shutdown
+5V	5.7V	6.9V	PSU shutdown
+12V	13V	14.3V	PSU shutdown

Note : The power supply shall be test at max AC voltage (230Vac) and min load or no load.

### 6.2. Under-voltage protection

Output	Min	Max	Comments
+3.3V	2.0V	2.4V	PSU shutdown
+5V	3.3V	3.7V	PSU shutdown
+12V	8.5V	9.5V	PSU shutdown

Note : The power supply shall be test at max AC voltage (230Vac) and min load or no load.

### 6.3. Over current protection

Output	Over Current(Type)	Over Current(Max.)	Comments
+3.3V	$\geq 35.2A$	48A	PSU shutdown
+5V	$\geq 35.2A$	48A	PSU shutdown
+12V	$\geq 62.7A$	85.5A	PSU shutdown

Note : The over current protection should be tested at other load rating.

#### 6.4. Short circuit protection

Output	Comments
+3.3V	PSU shutdown
+5V	PSU shutdown
+12V	PSU shutdown

Note : The Short circuit protection should be tested at other load rating.

#### 6.5. Thermal Protection

The power supply shall go into thermal protection as the case temperature exceeds 86°C ( $\pm 5^\circ\text{C}$ ) limit. The output shall recover only when the temperature becomes normal and AC power is turned on again.

### 7. Power System Signal status

#### 7.1. Buzzer status

Power Supply Condition	Buzzer status
No AC power to all PSU	OFF
AC present/Only Standby Output On	OFF
Power supply DC outputs ON and OK	OFF
Power supply failure	Beeping

#### 7.2. LED indicators

Power Supply Condition	Power system status		Per Power Module status
	RED	GREEN	ORANGE
No AC power to all PSU	OFF	OFF	OFF
AC present/Only Standby Output On	ON	OFF	OFF
Power supply DC outputs ON and OK	OFF	ON	ON
Power supply failure	OFF	Blinking	OFF



### 7.3. TTL signal

POWER SUPPLY CONDITION	OUTPUT CONDITION	
	Min.	Max.
NORMAL(POWER SUPPLY ON)	3V	5.25V
FAILURE(POWER SUPPLY OFF)	0V	1V

## 8. Load sharing

Output Voltage	Load Current	Load Share Voltage
+12V	1A	+0.48V ~ +0.52V
+5V	1A	+0.33V ~ +0.37V
+3.3V	1A	+0.33V ~ +0.37V

## 9. Isolation

### 9.1. Insulation Resistance

Input To Output	500Vdc , 50M ohms Min.( at room Temperature)
Input To FG	500Vdc , 50M ohms Min.( at room Temperature)
Output To FG	Non Insulation

### 9.2. Dielectric Withstand Voltage

Input To Output	1834Vac (30 mA) for 1 Minute.
Input To FG	1834Vac (30 mA) for 1 Minute.
Output To FG	Non Insulation

### 9.3. Leakage current

3.5mA max. at 120~264Vac/50~60HZ.

## 10. Safety Requirements

- IEC 60950-1
- TUV EN 60950-1
- UL or cUL
- BSMI
- CCC

## 11. EMC

The power supply shall comply with the following criterion:

### 11.1. EMI

#### 1) Conduction Emission:

A.EN55022:2006/A1:2007 CLASS A; EN55024:1998/A1:2001/A2:20003.

B.CISPR PUB.22 and FCC PART 15 SUBPART B CLASS A.

#### 2) Radiated Emission :

A.EN55022:2006/A1:2007 CLASS A; EN55024:1998/A1:2001/A2:20003.

B.CISPR PUB.22 and FCC PART 15 SUBPART B CLASS A.

## 12. Environmental

### 12.1. Temperature

Operating : 0°C to +50°C

Non Operating: -20°C to +70°C

### 12.2. Humidity

Operating : 5% to 95%, non-condensing

Non Operating: 20% to 90%,non-condensing

### 12.3. Altitude:

Altitude during operation: Up to 5000 m

Altitude of test laboratory: Below 2000 m

### 12.4. Cooling Method

BY BALL BEARING DC FAN.


## 13. Reliability

### 13.1 MTBF Qualification

Using MIL - HDBK -217F the calculated MTBF > 100,000 hours at 25°C

# 14. Mechanical 2D Drawing and Power Connector

## 14.1. Outside Dimension:199(D)x150(W)x86(H)mm

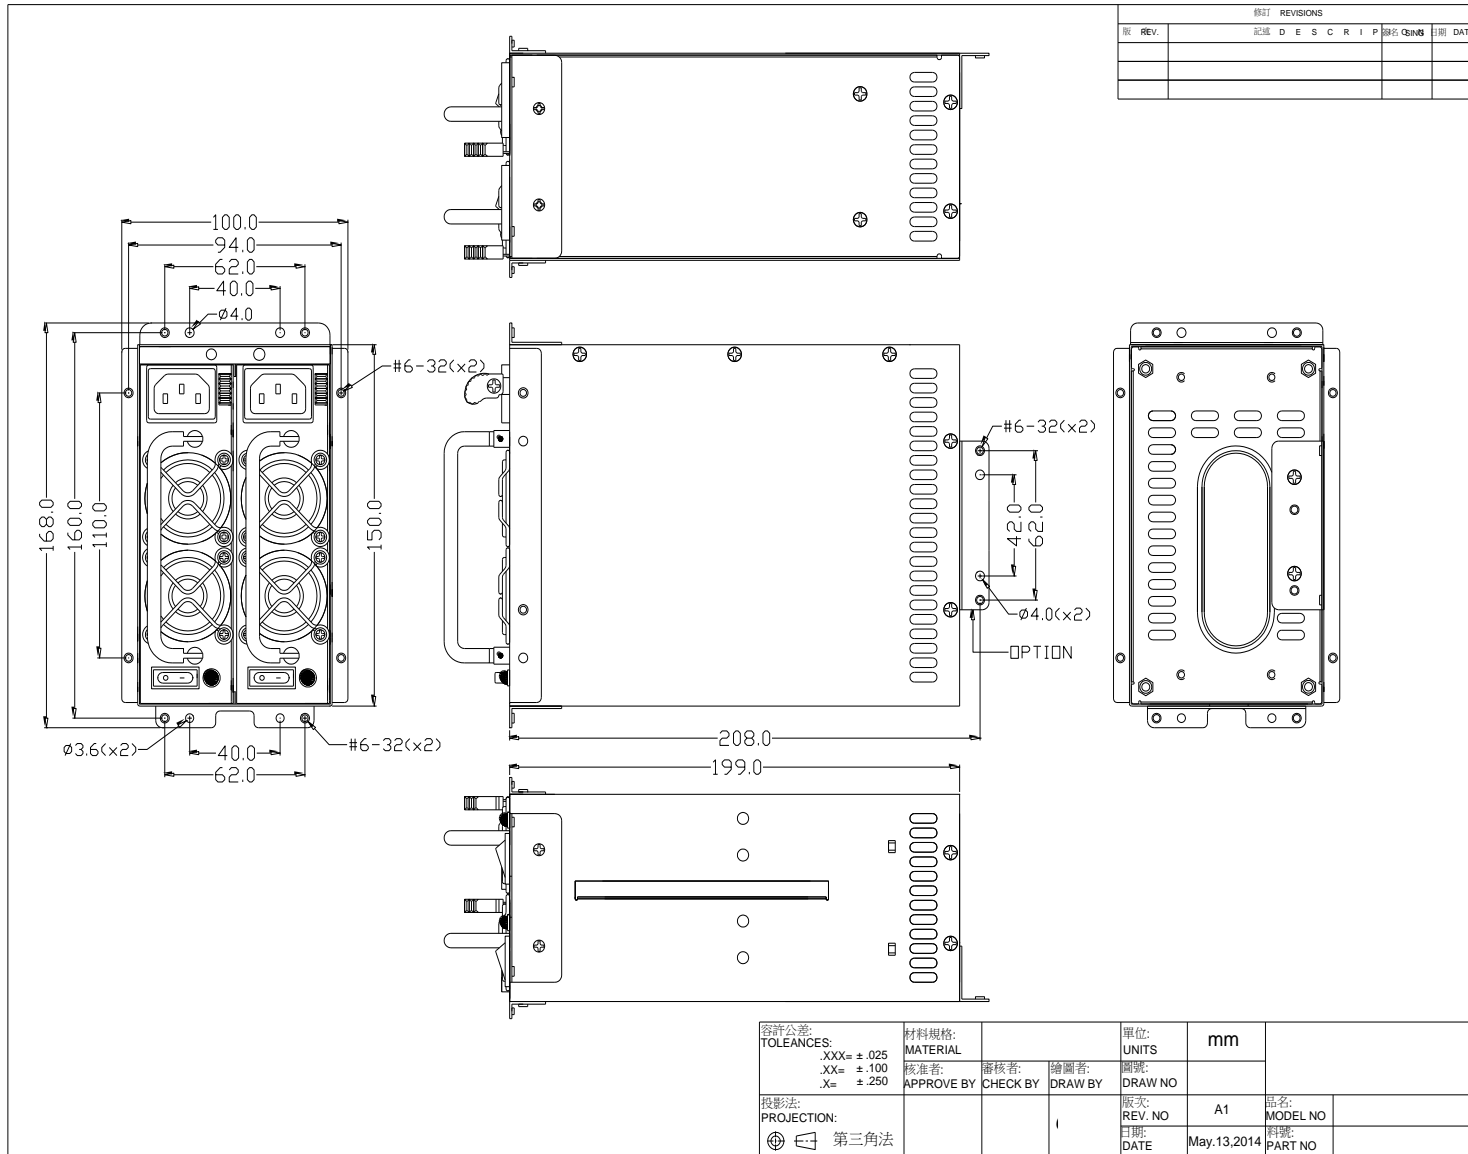

# 14.2. DC Output cables

