

RSC-1DTS

Features :

- Tool-less design supports quick installation and easy maintenance:
 - Tool-less 2.5" drive trays
 - Tool-less slide rail
- Supports 4 x 12G 3.5" hot swap drive bays
- Supports single and redundant power supplies
- Supports 1 full height expansion slot
- One front access USB 3.0 port

SPECIFICATIONS

Dimensions (W x D x H)	mm : 438 x 560 x 43.5	
	inches : 17 x 22 x 1.72	
Industry Standard	EIA-RS310D	
Material	SGCC	
Color	Front Panel : Black	
Cooling	Middle: 4 x 40x28mm PWM fans	
Power Supply	Standard	400W single PSU
	Option	300W 1+1 redundant
Expansion Slot	1 full height	
Front Panel	System power on/off and system reset, 1 x USB 3.0 port	
LED Indicators	Power, HDD and LAN	
System Board	Up to 12"(W) x 9.6"(D) ATX MB	

Drive Bays	External	3.5" hot swap	4
	Internal	2.5	4 (9mm SSD)
Backplanes	4-port with SFF-8643 connector supports 12G		
Storage Temperature	0°C(32°F) ~ 50°C(122°F)		
Humidity	5%~95% non-condensing		
Gross Weight	(w/ PSU & Rail)	kgs : 14	
		lbs : 30.9	
Packaging Dimensions	(W x D x H)	mm : 588 x 730 x 178	
		inches : 23.1 x 28.7 x 7	
Cubic Feet	4.2		
Container Load Quantity	20'	200	
	40'	400	
	40' H	450	
Mounting	Standard	28" tool-less slide rail	

FRONT VIEW

4 x 3.5" hot swap & tool-less drive bays




REAR VIEW

1 full height slot




TOP VIEW

400W single power supply or
300W 1+1 redundant power supply

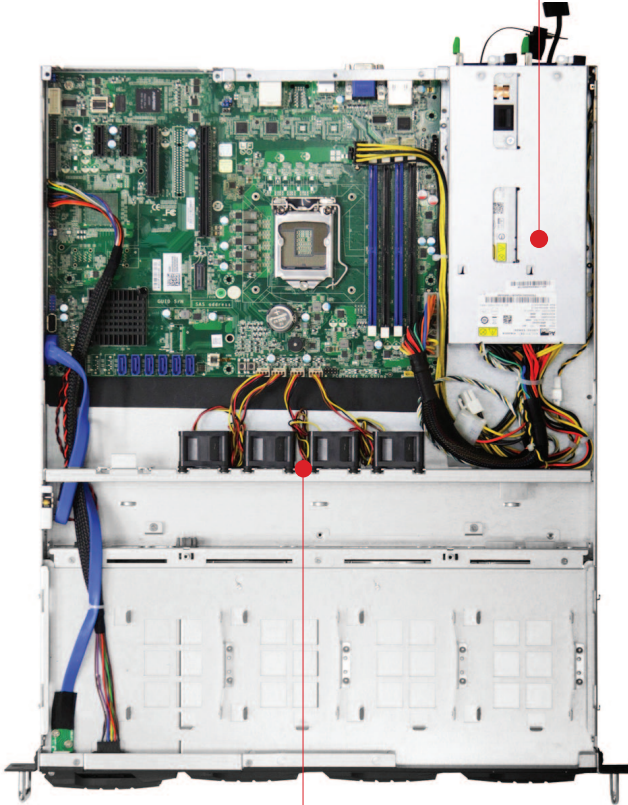

4 x 4028 PWM fans

MECHANICAL DRAWING

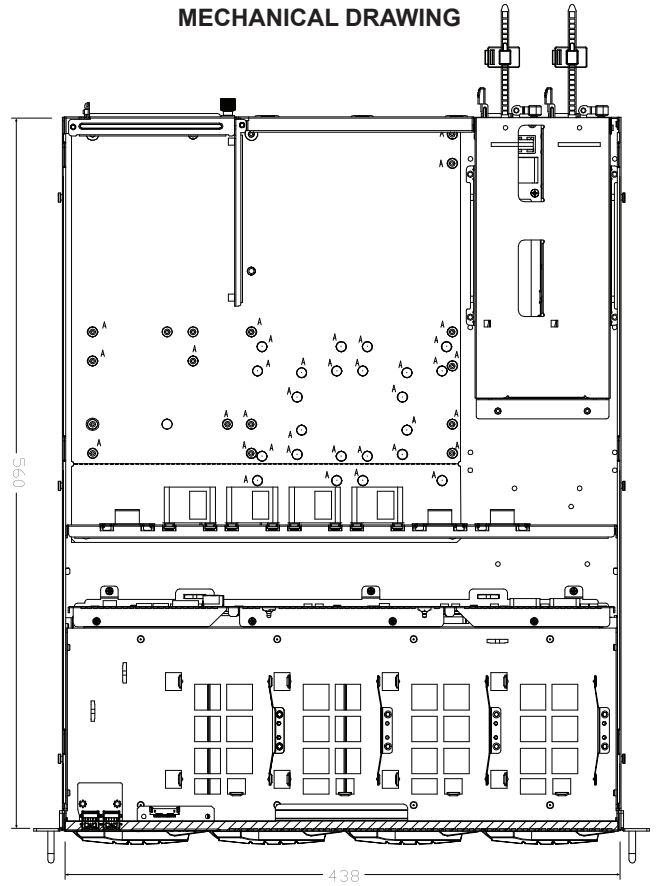

Power supply is included. Motherboard is not included.